




Product designation Product type designation			Bus module for EASY BRANCH EXS0000
Auxiliary supply Us			2700000
Auxiliary rated supply voltage DC		VDC	24
Auxiliary operating voltage range			
DC			
	min	VDC	20.4
	Max	VDC	27.6
Power dissipation Max		W	5.5
Mechanical features			
Housing type			Polyamide
Terminals type			Screw
Conductor cross section			_
	min	mm²	0.2
	Max	mm²	2.5
	min	AWG	12
	Max	AWG	24
Tightening torque (Max)			
		Nm	0.5
		lbin	4.5
Weight		g	90
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+60
Storage temperature			
	min	°C	-30
	max	°C	+80
Relative humidity		%	<80
Maximum Pollution degree			2
Overvoltage category			3
Protection degree			IP20
Dimensions			





ENERGY AND AUTOMATION

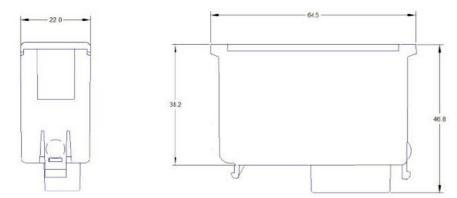

Certifications and compliance

Compliance

IEC/EN/BS 61000-6-2

IEC/EN/BS 61000-6-4

IEC/EN/BS 61010-1

Certificates

CE

EAC

UKCA