




Current inputs			
Rated current (Ie)	A	125	
Current			
IEC maximum (Imax)	A	125	
IEC rated (Iref-Ib)	A	20	
IEC start (Ist)	mA	40	
Insulations			
Rated insulation voltage Ui IEC/EN	V	600	
Mechanical features			
Housing type		Polyamide	
Terminals type		RJ45	
Weight	g	150	
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-30
	max	°C	+70
Storage temperature			
	min	°C	-30
	max	°C	+80
Relative humidity		%	<80
Maximum Pollution degree			2
Overvoltage category			3
Protection degree			IP20

Dimensions

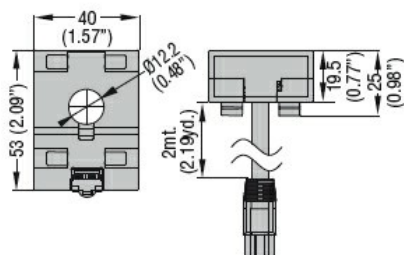

Certifications and compliance	
Compliance	
	IEC/EN/BS 61000-6-2
	IEC/EN/BS 61000-6-4
	IEC/EN/BS 61010-1
Certificates	
	CE
	cETLus
	EAC
	UKCA
ETIM classification	

ETIM 8.0

EC002475 -
Current value
transformer