



Current inputs

Rated current (Ie)	A	32
--------------------	---	----

Current

IEC maximum (Imax)	A	32
IEC rated (Iref-Ib)	A	5
IEC start (Ist)	mA	10

Insulations

Rated insulation voltage Ui IEC/EN	V	600
------------------------------------	---	-----

Mechanical features

Housing type	Polyamide
Terminals type	RJ45
Weight	g140

Ambient conditions

Temperature

Operating temperature

min	°C	-30
max	°C	+70

Storage temperature

min	°C	-30
max	°C	+80


Relative humidity	%	<80
-------------------	---	-----

Maximum Pollution degree	2
--------------------------	---

Overvoltage category	3
----------------------	---

Protection degree	IP20
-------------------	------

Dimensions

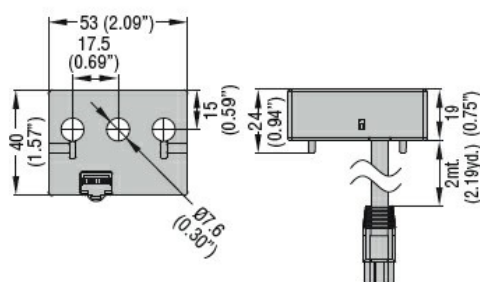

Certifications and compliance

Compliance

IEC/EN/BS 61000-6-2
IEC/EN/BS 61000-6-4
IEC/EN/BS 61010-1

Certificates

CE
cETLus
EAC
UKCA

ETIM classification

ETIM 8.0

EC002475 -
Current value
transformer