




Current inputs			
Rated current (Ie)	A	80	
Current			
IEC maximum (Imax)	A	80	
IEC rated (Iref-Ib)	A	15	
IEC start (Ist)	mA	30	
Insulations			
Rated insulation voltage Ui IEC/EN	V	600	
Mechanical features			
Housing type		Polyamide	
Terminals type		RJ45	
Weight	g	180	
Ambient conditions			
Temperature			
Operating temperature		min	°C -30
		max	°C +70
Storage temperature		min	°C -30
		max	°C +80
Relative humidity	%	<80	
Maximum Pollution degree		2	
Overvoltage category		3	
Protection degree		IP20	

Dimensions

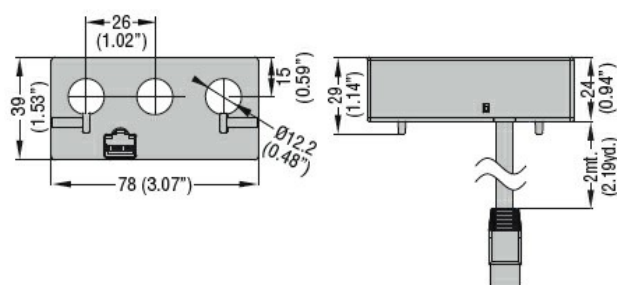

Certifications and compliance	
Compliance	
	IEC/EN/BS 61000-6-2
	IEC/EN/BS 61000-6-4
	IEC/EN/BS 61010-1
Certificates	
	CE
	cETLus
	EAC
	UKCA
ETIM classification	

ETIM 8.0

EC002475 -
Current value
transformer