



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$

A 16

Mechanical features

Tightening torque for terminals


min	Nm	1.8
max	Nm	2
min	lbin	16
max	lbin	18

UL technical data


UL Standard

UL60947-4-1

Dimensions

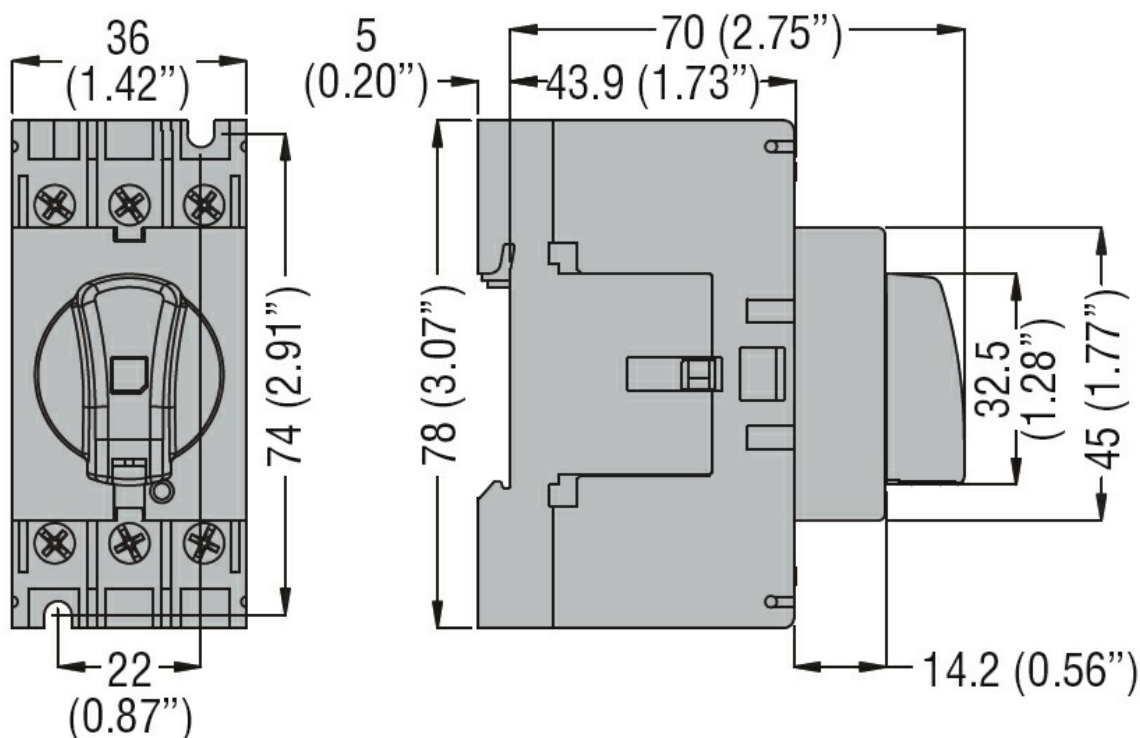

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°60947-4-1

IEC/EN 60335-2-89

IEC/EN 60947-1

IEC/EN 60947-3

UL60947-4-1

Certifications

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 n°60947-4-1

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus according to UL60947-4-1

EAC

KEMA

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000216 -
Switch
disconnecter