



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$

A 10

Reactive power for control of capacitors at

Mechanical life

cycles 100000

Mechanical features

Fixing

Side mounting

Tightening torque for terminals


max	Nm	0.8
min	Ibin	7.1

Conductor section

Weight

g 30


Dimensions

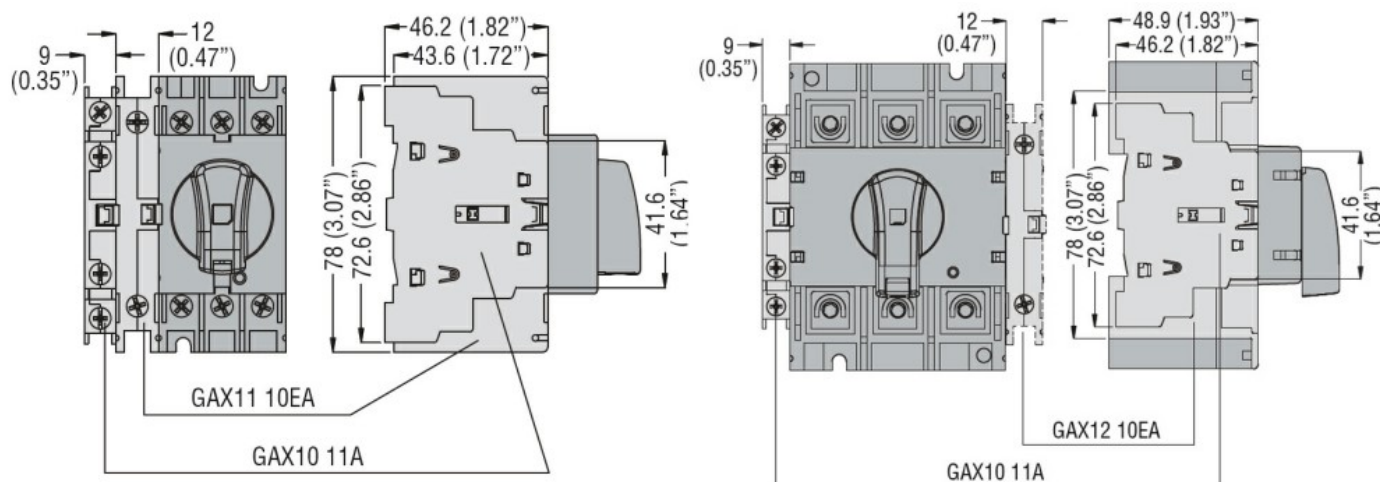

Wiring diagrams

Auxiliary contacts

GAX10...



Certifications and compliance

Compliance

CSA C22.2

IEC/EN 60335-2-89

IEC/EN 60947-1

IEC/EN 60947-3

IEC/EN 60947-5-1

UL508

UL98

Certifications

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 n°60947-4-1

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus according to UL60947-4-1

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block