



Contact characteristics


IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}C$

A63

Mechanical features

Tightening torque for terminals		
min	Nm	1.8
max	Nm	2
min	lbin	16
max	lbin	18


Dimensions

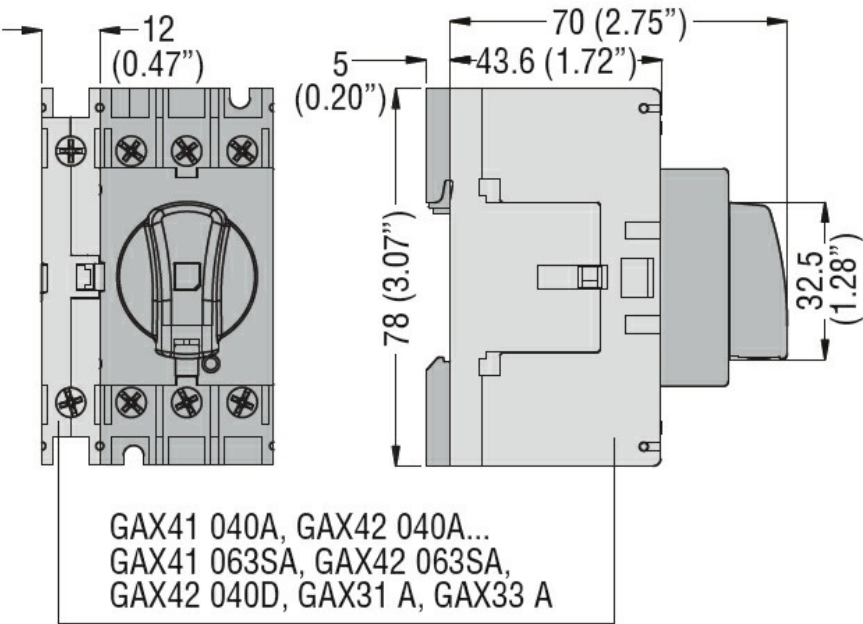

Wiring diagrams

Fourth pole add on

GAX42...GAX41...

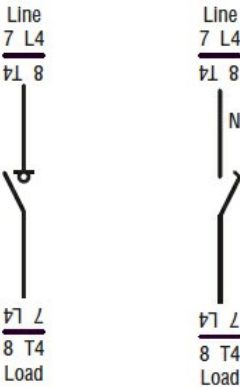

Certifications and compliance

Compliance

CSA C22.2

IEC/EN 60335-2-89

IEC/EN 60947-1

IEC/EN 60947-3

UL508

UL98

Certifications

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 n°60947-4-1

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus according to UL60947-4-1

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology