



Number of poles	Nr.	1
Operating voltage type		AC

Contact characteristics


IEC Conventional free air thermal current Ith	A	125
---	---	-----

Mechanical features

Tightening torque for terminals

min	Nm	5
max	Nm	6
min	lbin	45
max	lbin	54


Dimensions

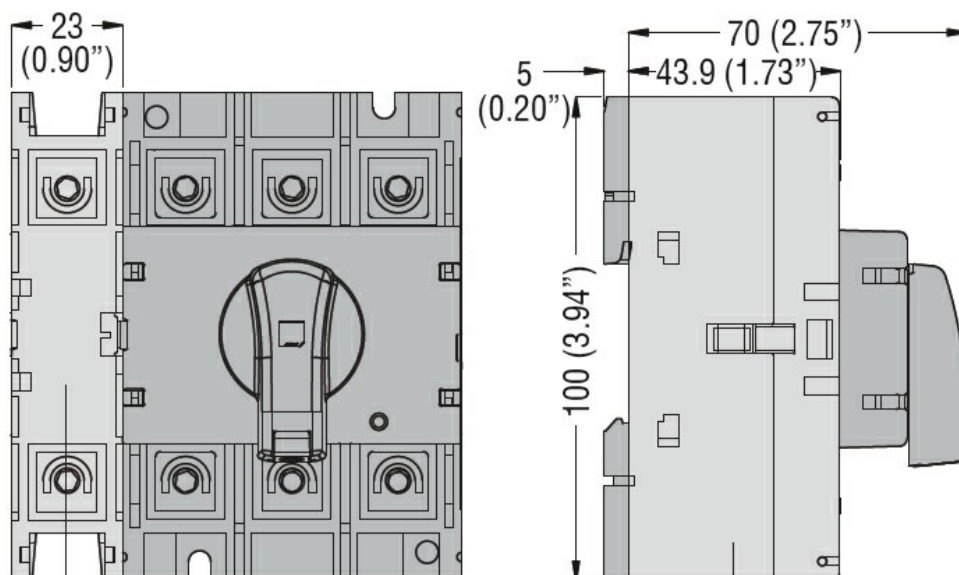

GAX41 125A, GAX42 063A... GAX42 160A,
GAX32 A, GAX34 A

Wiring diagrams

Fourth pole add on
GAX42... **GAX41...**

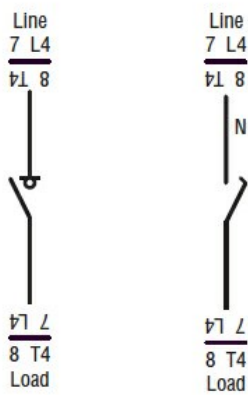

Certifications and compliance

Compliance

CSA C22.2
IEC/EN 60947-1
IEC/EN 60947-3
UL508
UL98

Certifications

CCC
CSA C22.2 n°4
cULus according to UL98
EAC

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology