





Number of poles	Nr.	1
Operating voltage type		AC
Contact characteristics		
IEC Conventional free air thermal current Ith	A	80
Mechanical features		
Tightening torque for terminals	min	Nm 5
	max	Nm 6
	min	lbin 45
	max	lbin 54

Dimensions

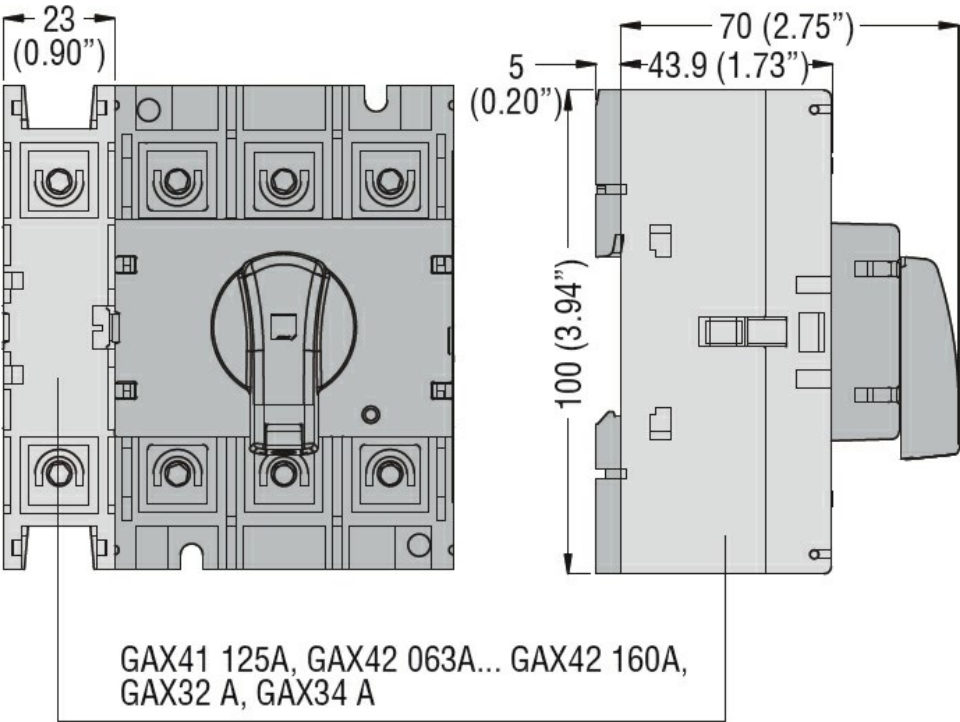

Wiring diagrams

Fourth pole add on  
**GAX42...** **GAX41...**

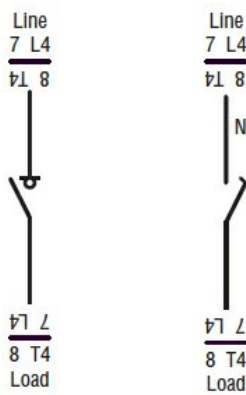

Certifications and compliance

Compliance	CSA C22.2
	IEC/EN 60947-1
	IEC/EN 60947-3
	UL508
	UL98

Certifications	CCC
	CSA C22.2 n°4
	cULus according to UL98
	EAC

ETIM classification

ETIM 8.0	EC002498 - Accessories/spare parts for low- voltage switch technology
----------	---