



**Contact characteristics**


IEC Conventional free air thermal current  $I_{th} \leq 40^\circ\text{C}$  A 125

**Mechanical features**

Tightening torque for terminals


	min	Nm	5
	max	Nm	6
	min	lbin	45
	max	lbin	54

**Dimensions**

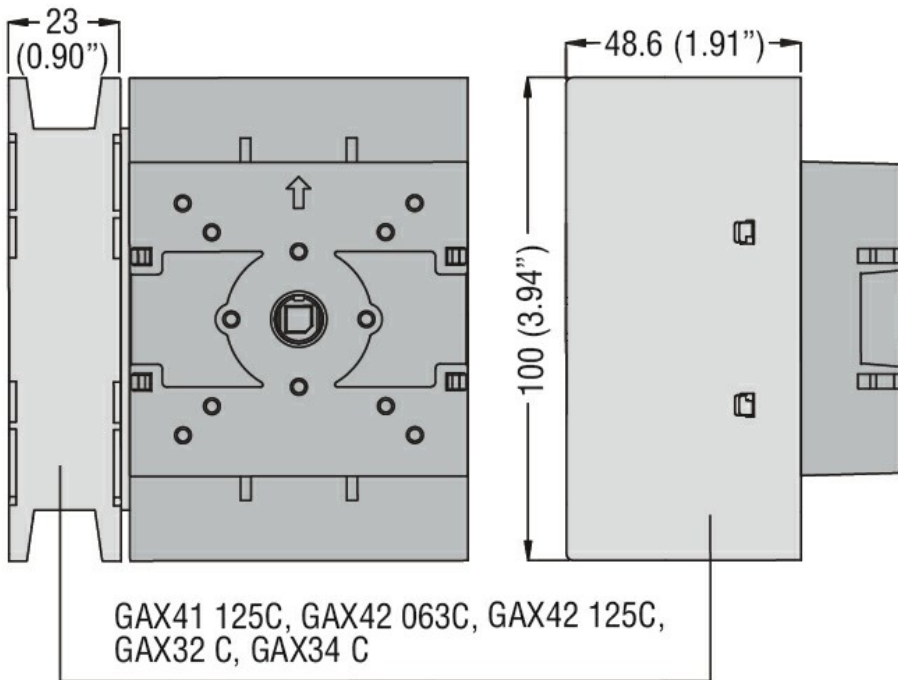

**Wiring diagrams**

Fourth pole add on  
**GAX42...**      **GAX41...**

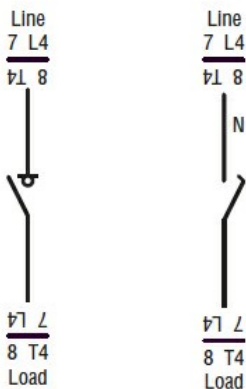

## Certifications and compliance

### Compliance

CSA C22.2

IEC/EN 60335-2-89

IEC/EN 60947-1

IEC/EN 60947-3

UL508

UL98

### Certifications

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 n°14

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus according to UL508

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

## ETIM classification

ETIM 8.0

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology