


DOOR-COUPLING HANDLE, PADLOCKABLE. BLACK, ROTATING, FOR GA...A, GA063SA, GA016 C-GA040 C AND GA...D. RING FIXING. PROTRUDING SELECTOR, PADLOCKABLE AT ON (PER UNI 9490 AND UNI EN 12845 - FIREFIGHTING SYSTEMS); 5MM/0.2". IEC IP65/UL TYPE 4X



Dimensions

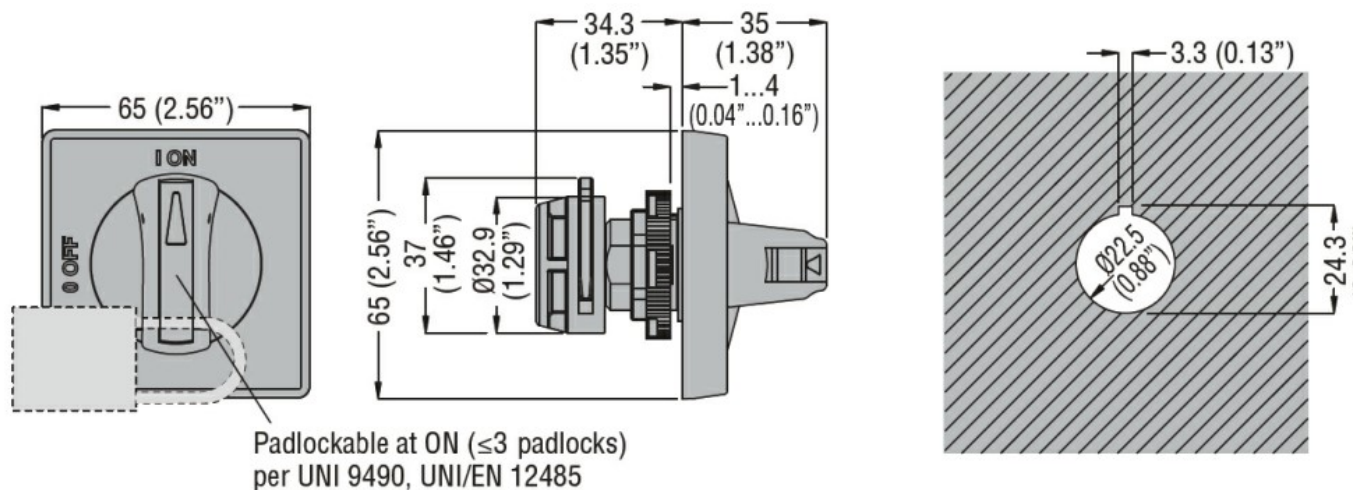

Certifications and compliance

Compliance

CSA C22.2

IEC/EN 60947-1

IEC/EN 60947-3

UL508

UL98

Certifications

cULus

EAC

ETIM classification

ETIM 8.0

EC000230 -
Door coupling
handle for
switchgear