



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$	A	63
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	8
Operating current I_e		
AC21A		
	400V	A 63
	500V	A 63
	690V	A 63
AC22A		
	400V	A 63
	500V	A 45
	690V	A 45
AC23A		
	400V	A 45
	500V	A 25
	690V	A 25
Power dissipation per pole max	W	2.9
Rated operational power AC23A		
	400V	kW 22
	690V	kW 22
Reactive power for control of capacitors at		
Rated short time current (1s) I_{cw} (rms)	kA	0.8
Conditional short-circuit current (rms)	kA	10
Short-circuit protection with fuse	Class/A	gG63
Making capacity AC23A 400V	A	450
Breaking capacity AC23A 400V	A	360
Mechanical life	cycles	100000
Electrical life AC21A	cycles	15000

Mechanical features

Operating position	normal allowable	Vertical plan Any
Terminals	type width mm height mm screw tool	Pillar 5.6 6.5 M4 Phillips 2
Tightening torque for terminals	min max min max	Nm Nm lbin lbin 1.8 2 16 18

Conductor section

IEC min	mm ²	0.75
IEC max	mm ²	16
AWG/kcmil min		18
AWG/kcmil max	kcmil	6

UL technical data

General purpose current rating	A	60
Operating voltage max	V	600
Horsepower/FLA current single phase motor		
	120V	HP/A 2/24
	240V	HP/A 7,5/40
Horsepower/FLA current three phase motor		
	200-208V	HP/A 10/32.2
	240V	HP/A 15/42
	480V	HP/A 30/40
	600V	HP/A 30/32
Short circuit rating	kA rms	5
Short circuit rating with fuse	Class/A	RK5/45




Ambient conditions

Operating temperature			
	min	°C	-25
	max	°C	+55
Storage temperature			
	min	°C	-40
	max	°C	+70
Max altitude	m		3000


Resistance & Protection

Frontal IP degree	IP65
UL degree of protection	UL/CSA Type 4/4X
IP degree of protection	IP65
Pollution degree	3

Dimensions

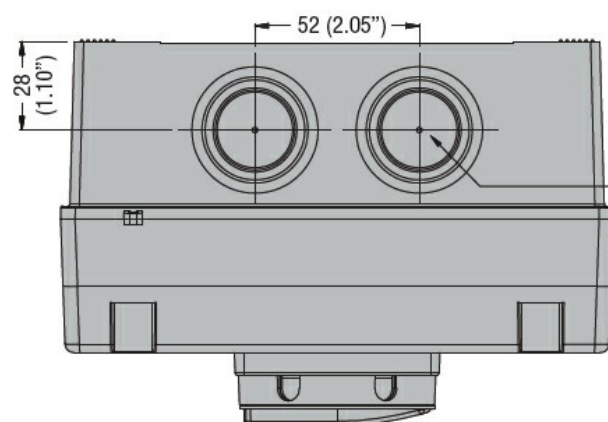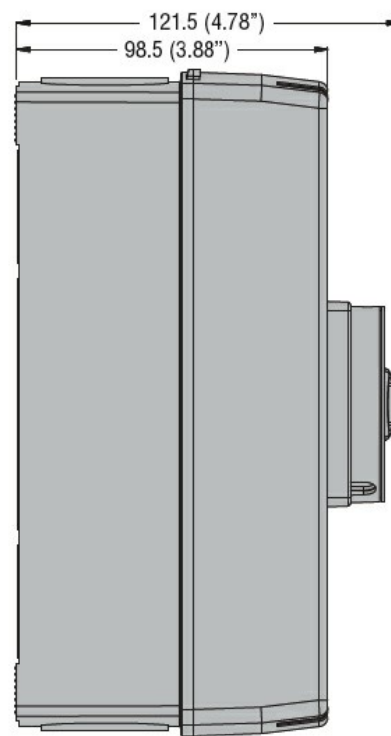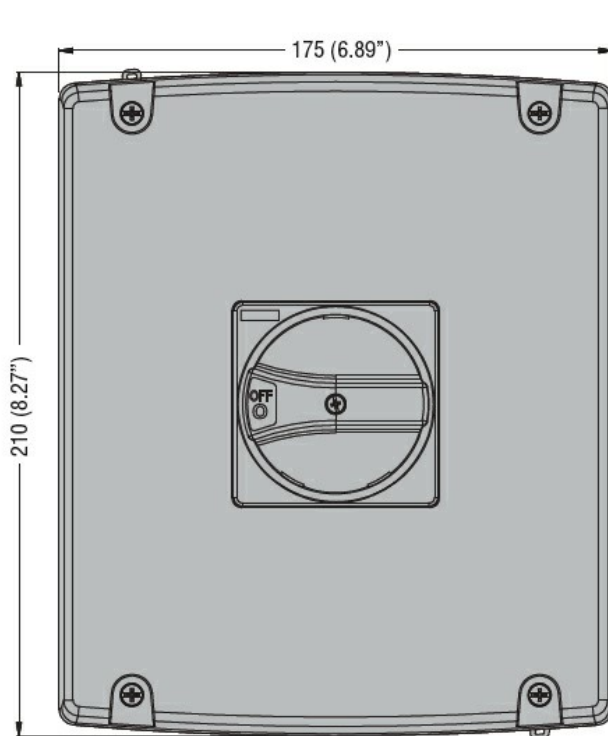


Drilling for surface fixing

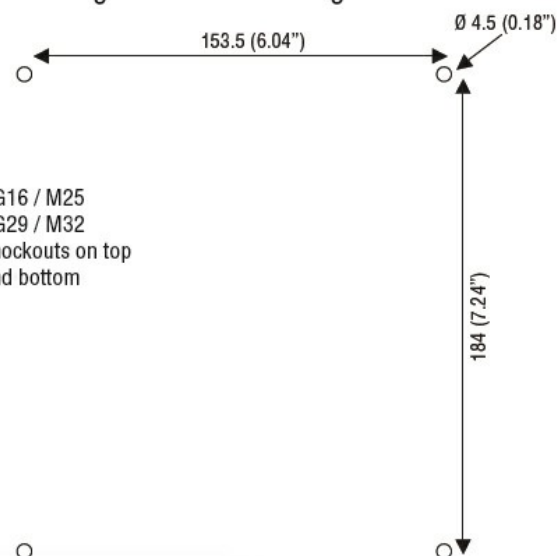

PG16 / M25
PG29 / M32
knockouts on top
and bottom

Wiring diagrams



Certifications and compliance

Compliance

UL/CSA TYPE 4/4X NON-METALLIC ENCLOSURED SWITCH DISCONNECTOR, THREE-POLE.
WITH ROTATING BLACK HANDLE, 32A. ENCLOSURE DIMENSIONS:
175X210X99MM/6.9X8.3X3.9"

	IEC/EN 60947-1
	IEC/EN 60947-3

Certifications

	cULus
	EAC

ETIM classification

ETIM 8.0	EC000216 - Switch disconnector
----------	--------------------------------------