



Resistance & Protection


UL degree of protection

UL/CSA Type
4/4X

IP degree of protection

IP65

Dimensions

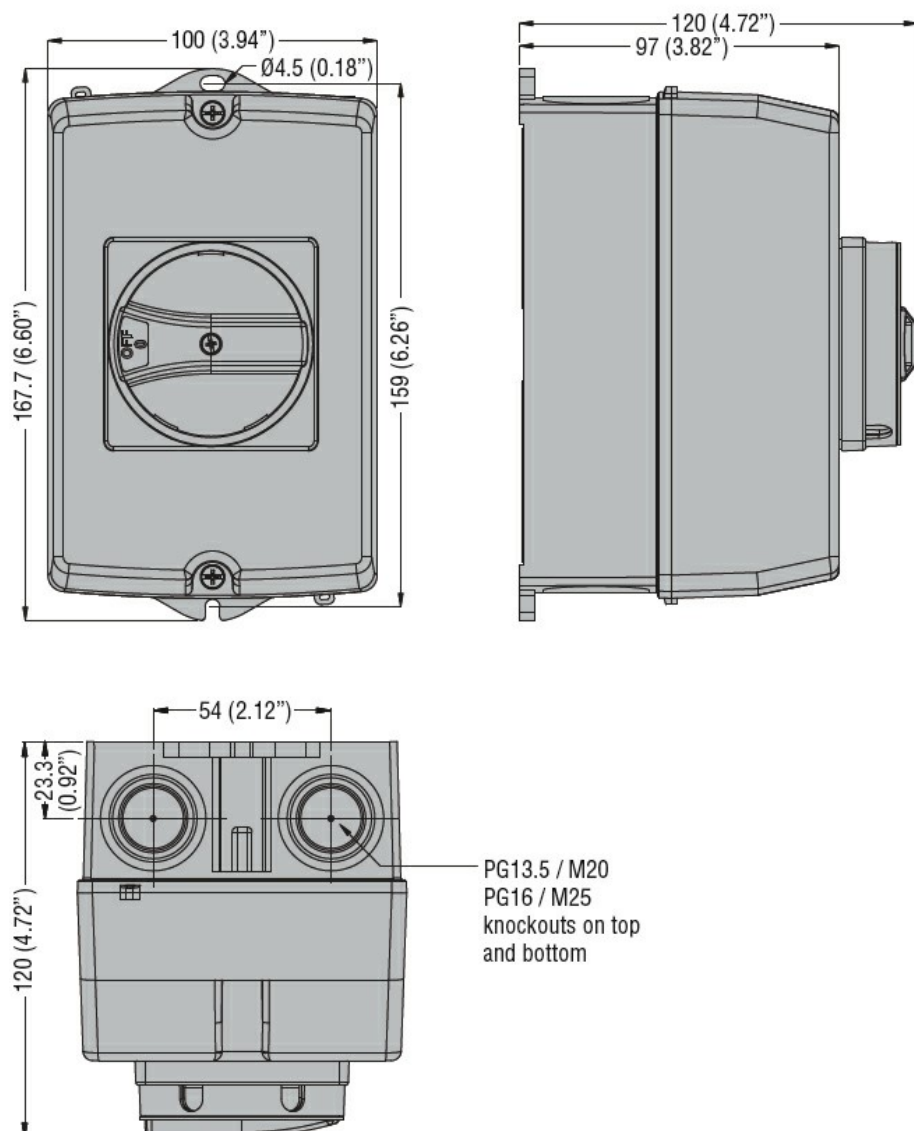

Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-3

Certifications

cULus

EAC

EMPTY PLASTIC ENCLOSURE UL/CSA TYPE 4/4X, FOR SWITCH DISCONNECTORS. WITH
ROTATING RED/YELLOW HANDLE, FOR GA016A-GA040A AND GA040D. ENCLOSURE
DIMENSIONS: 100X168X97MM/3.9X6.6X3.8"

ETIM classification

ETIM 8.0

EC000712 -
Empty enclosure
for switchgear