



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	315
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	8
Operating current I_e		
AC21A		
	400V	A 315
	500V	A 315
	690V	A 315
AC22A		
	400V	A 315
	500V	A 315
	690V	A 250
AC23A		
	400V	A 200
	500V	A 160
Power dissipation per pole max	W	13.5
Rated operational power AC23A		
	400V	kW 125
	690V	kW 108
Reactive power for control of capacitors at		
Rated short time current (1s) I_{cw} (rms)	kA	8
Conditional short-circuit current (rms)	kA	100
Short-circuit protection with fuse	Class/A	gG315
Making capacity AC23A 400V	A	4000
Mechanical life	cycles	10000
Electrical life AC21A	cycles	1000 (AC23A 400V)

Mechanical features

Operating position	normal allowable	Vertical plan Any
Fixing		Screw
Terminals	type screw	Bar M10
Tightening torque for terminals	max max	Nm 24 lbin 18
Conductor section		
Bar dimensions max		25x3

Ambient conditions

Operating temperature	min max	$^\circ\text{C}$ $^\circ\text{C}$	-25 55
-----------------------	------------	--------------------------------------	-----------

Storage temperature

min °C -40
max °C 70

Max altitude

m 3000

Resistance & Protection


Frontal IP degree

IP20

Pollution degree

3


Dimensions

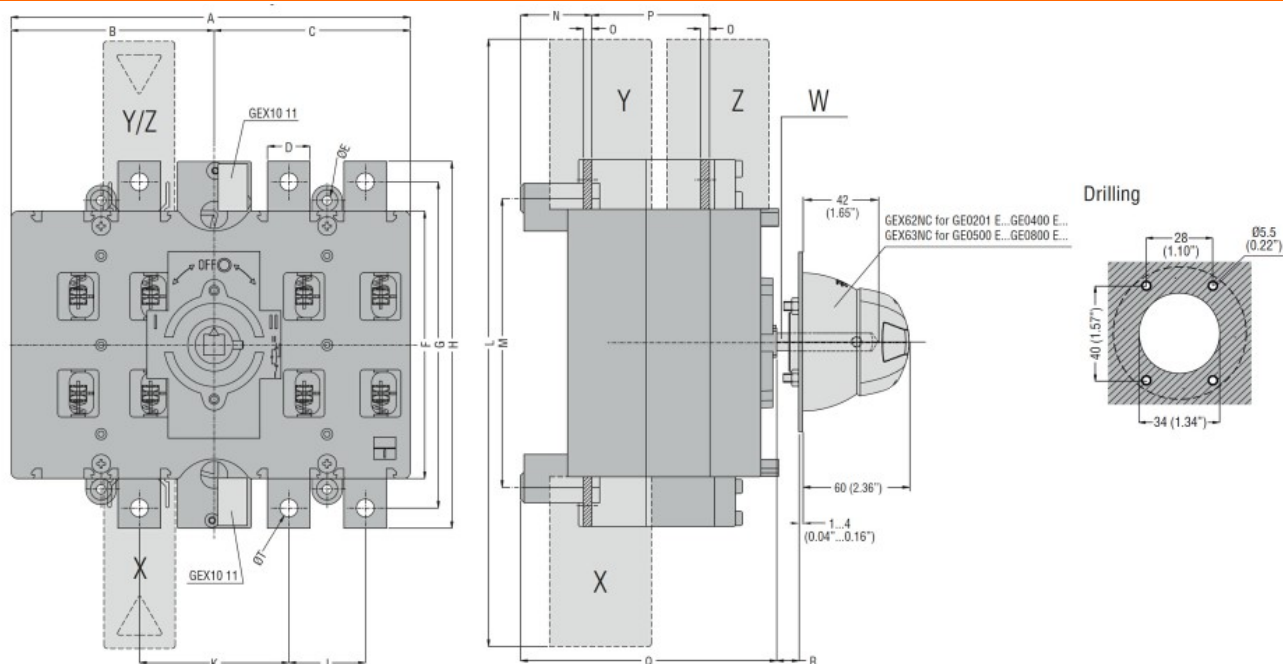

TYPE	A	B	C	D	ØE	F	G	H	J	K	L	M	N	O	P	Q	R Max	S	ØT	U	V	Shaft extension W	Terminal covers (N° of pcs/set)		
																							X (line 1)	Y (line 2)	Z (load)
GE0201 E GE0250 E GE0315 E GE0400 E	235 (9.25")	119.5 (4.70")	115.5 (4.55")	25 (0.98")	5.5 (0.22")	157 (6.18")	192 (7.56")	216 (8.50")	45 (1.77")	88 (3.46")	357 (14.05")	170 (6.69")	42 (1.65")	3 (0.12)	67 (2.64")	151 (5.94")	437 (17.2")	143 (5.63")	M10 (5.24")	133 (5.29")	142 (5.59")	GEX7227N GEX7375N GEX7536N □ 10 (0.6")	GEX82 12 (3)	GEX82 11 (3)	GEX83 12 (3)
GE0201 ET4 GE0250 ET4 GE0315 ET4 GE0400 ET4																							GEX82 13 (4)	GEX82 13 (4)	GEX83 12 (4)
GE0500 E GE0630 E GE0800 E	321 (12.63")	162 (6.38")	159 (6.26")	40 (1.57")	7 (0.27")	232 (9.13")	282 (11.10")	312 (12.28")	65 (2.56")	121 (4.73")	482 (18.98")	247 (9.72")	46 (1.81")	5 (0.20")	87 (3.42")	180 (7.09")	417 (16.42")	176 (6.93")	M12 (7.32")	186 (7.32")	171 (6.73")	GEX7195N GEX7345N GEX7535N □ 10 (0.6")	GEX82 22 (3)	GEX82 21 (3)	GEX83 21 (3)
GE0500 ET4 GE0630 ET4 GE0800 ET4																							GEX82 23 (4)	GEX82 23 (4)	GEX83 22 (4)

Wiring diagrams

GE0201 E - GE1600 E

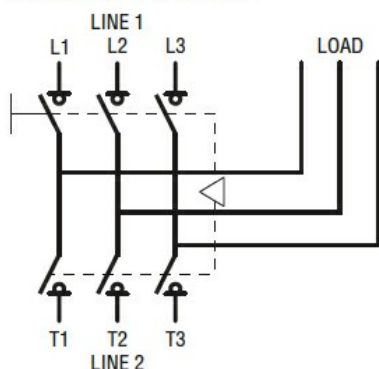

Certifications and compliance

Compliance

Certifications	IEC/EN 60947-1
	IEC/EN 60947-3
	EAC
ETIM classification	
ETIM 8.0	EC000216 - Switch disconnecter