



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	315
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	8
Operating current I_e		
AC21A		
	400V	A 315
	500V	A 315
	690V	A 250
AC22A		
	400V	A 315
	500V	A 315
	690V	A 200
AC23A		
	400V	A 315
	500V	A 250
	690V	A 160
Power dissipation per pole max	W	6.5
Rated operational power AC23A		
	400V	kW 174
	690V	kW 153
Reactive power for control of capacitors at		
Rated short time current (1s) I_{cw} (rms)	kA	12
Conditional short-circuit current (rms)	kA	100
Short-circuit protection with fuse	Class/A	gG315
Making capacity AC23A 400V	A	3150
Breaking capacity AC23A 400V	A	2520
Mechanical life	cycles	20000
Electrical life AC21A	cycles	1000 (AC23A 400V)

Mechanical features


Operating position	normal allowable	Vertical plan Any
Fixing		Screw
Terminals	type screw	Bar M10
Tightening torque for terminals	max max	Nm 18 lbin 10
Conductor section		
Bar dimensions max		25x4

Ambient conditions

Operating temperature


	min	°C	-25
	max	°C	55
Storage temperature			
	min	°C	-40
	max	°C	70
Max altitude	m		3000
Resistance & Protection			
Frontal IP degree			IP20
Pollution degree			3
Dimensions			

Door coupling version with handle
GEX66N - GEX66NB

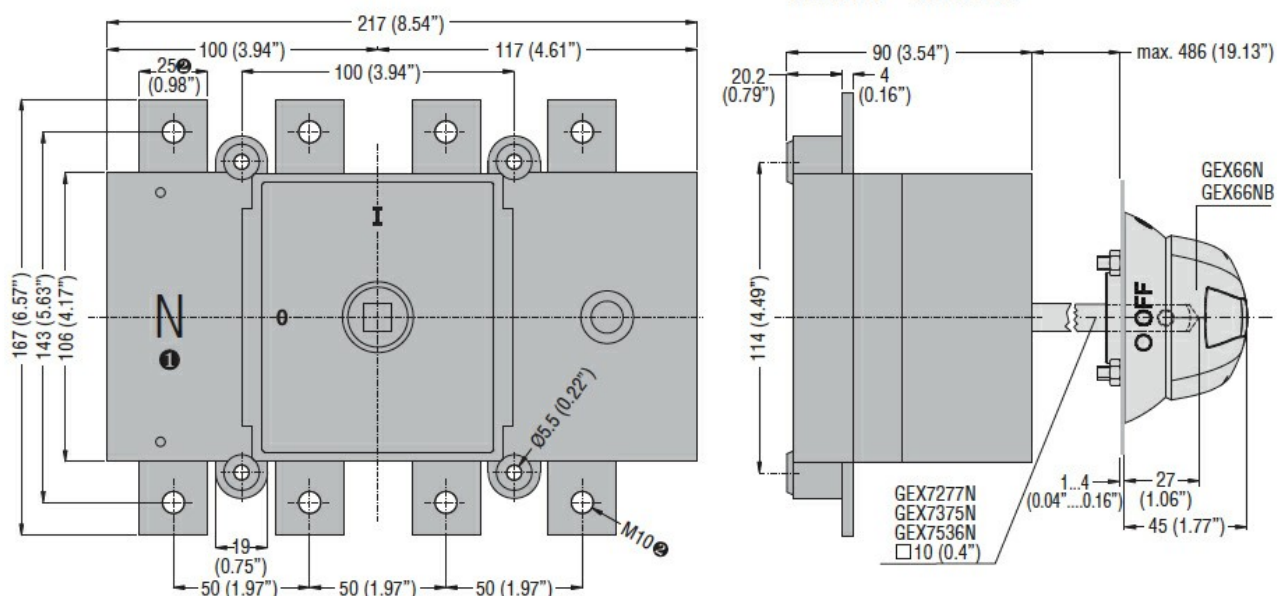


- ❶ Not indicated on GE... DT4 type.
- ❷ 20mm (0.79") and M8 for GE0125 DT4 type.

Direct operating version with handle
GEX66ND

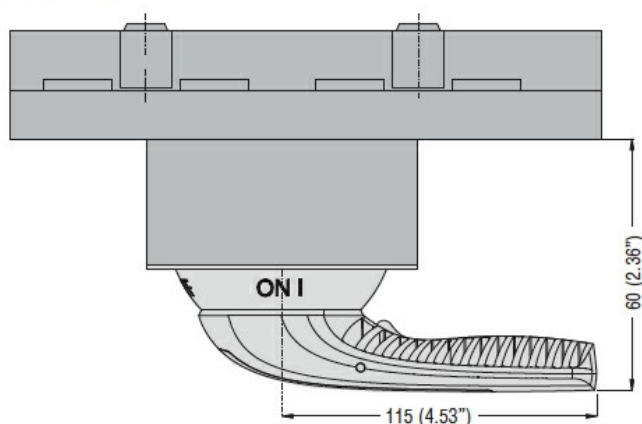

Wiring diagrams

Four-pole disconnectors
GE0160 T4 - GE1600 T4
GE0160 T4P



Certifications and compliance

Compliance	IEC/EN 60947-1
	IEC/EN 60947-3
Certifications	EAC

ETIM classification

ETIM 8.0	EC000216 - Switch disconnector
----------	--------------------------------------