



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	160
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	12
Operating current I_e		
AC21A		
	400V	A 160
	500V	A 160
	690V	A 160
	1000V	A 160
AC22A		
	400V	A 160
	500V	A 160
	690V	A 160
AC23A		
	400V	A 160
	500V	A 160
	690V	A 160
	1000V	A 135
Power dissipation per pole max	W	3.2
Rated operational power AC23A		
	400V	kW 90
	690V	kW 134
Reactive power for control of capacitors at		
	400V	kvar 80
Rated short time current (1s) I_{cw} (rms)	kA	6
Rated short time current (0.3s) I_{cw} (rms)	kA	12
Conditional short-circuit current (rms)	kA	100
Short-circuit protection with fuse	Class/A	gG/160
Making capacity AC23A 400V	A	1600
Breaking capacity AC23A 400V	A	1280
Mechanical life	cycles	20000

Mechanical features

Operating position	normal allowable	Vertical plan Any
Fixing		Screw / DIN rail 35mm
Terminals	type	M8 x 25
Tightening torque for terminals		
	min	Nm 15
	max	Nm 22
	min	lbin 132
	max	lbin 194

Conductor section

IEC min	mm ²	70
IEC max	mm ²	185
AWG/kcmil min		00
AWG/kcmil max	kcmil	400

Ambient conditions

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Max altitude


m	3000
---	------

Resistance & Protection


Pollution degree

3

Dimensions

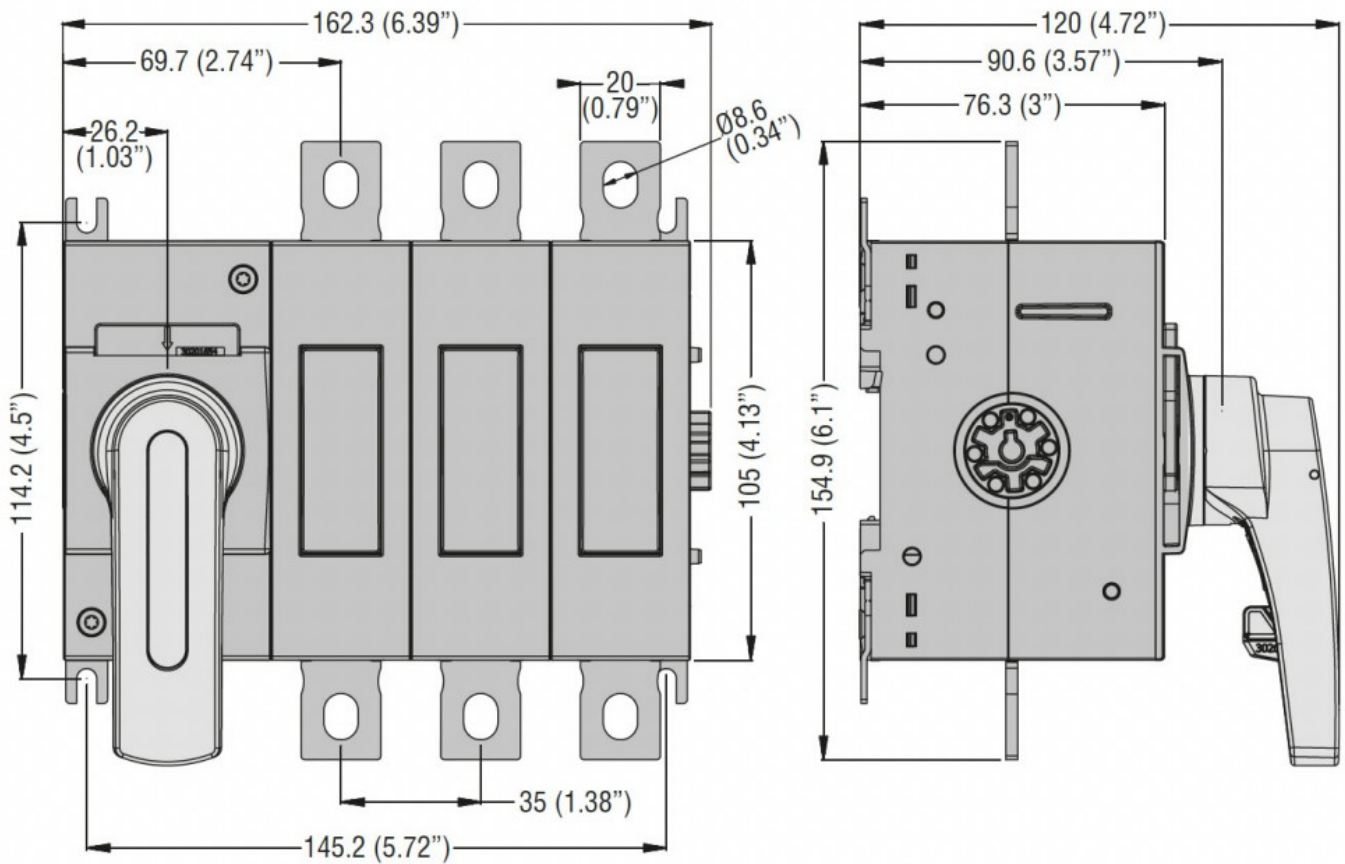

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-3

ETIM classification

ETIM 8.0

EC000216 -
Switch
disconnector