




Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$ A 200

UL technical data

UL Standard UL98

Dimensions

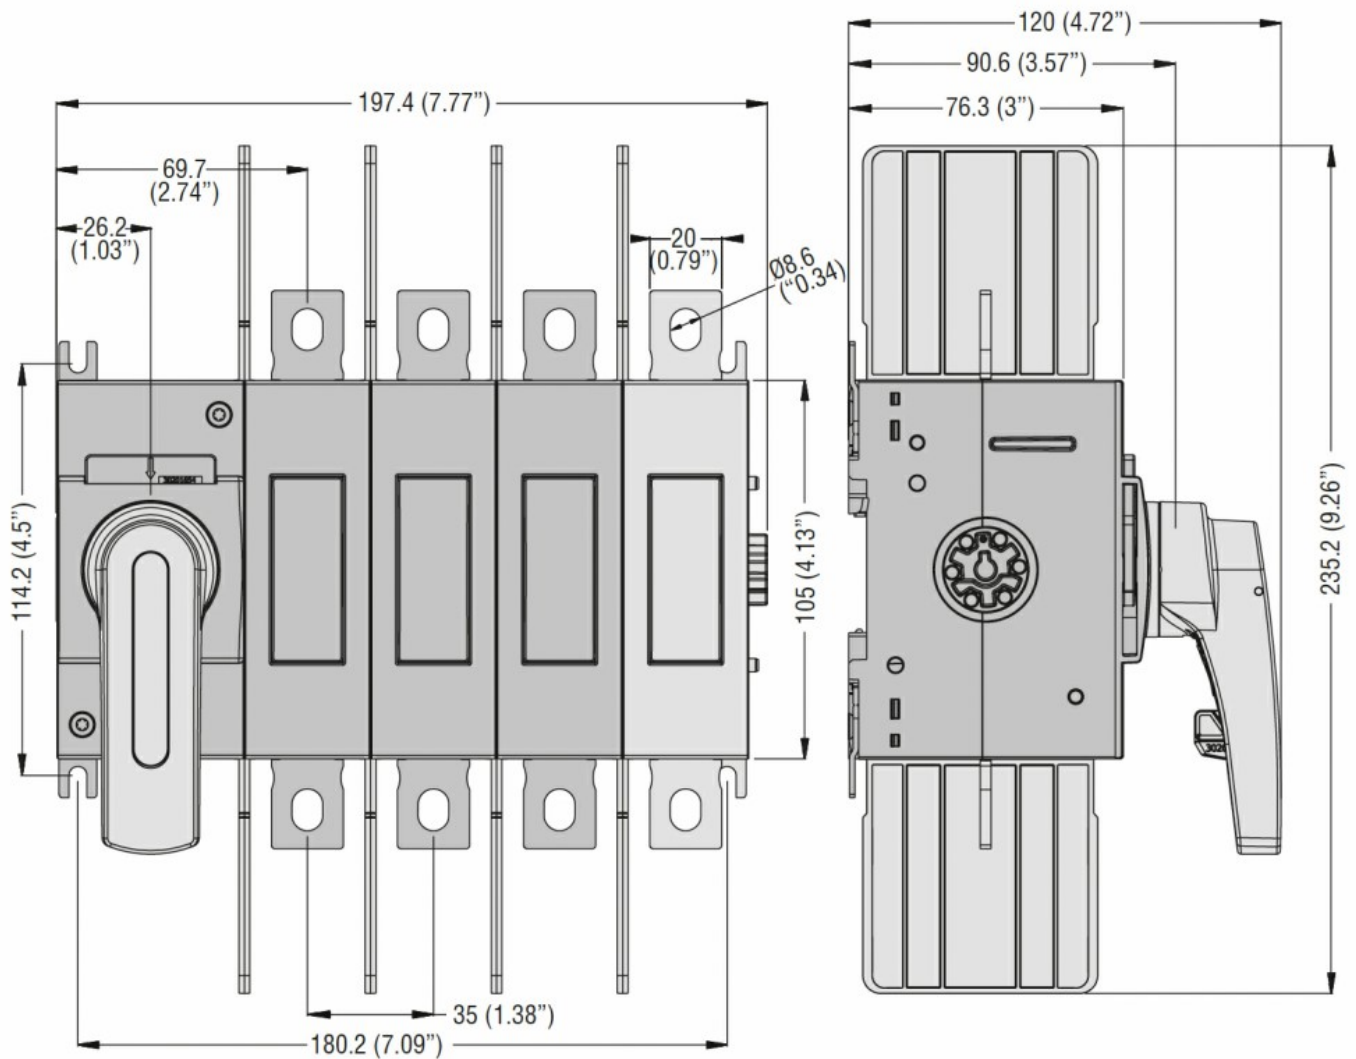

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-3

Certifications

cULus

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology