




#### Contact characteristics

|                                                                          |    |      |
|--------------------------------------------------------------------------|----|------|
| IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$ | A  | 400  |
| Rated insulation voltage $U_i$ IEC/EN                                    | V  | 1000 |
| Rated impulse withstand voltage $U_{imp}$                                | kV | 12   |

#### Dimensions

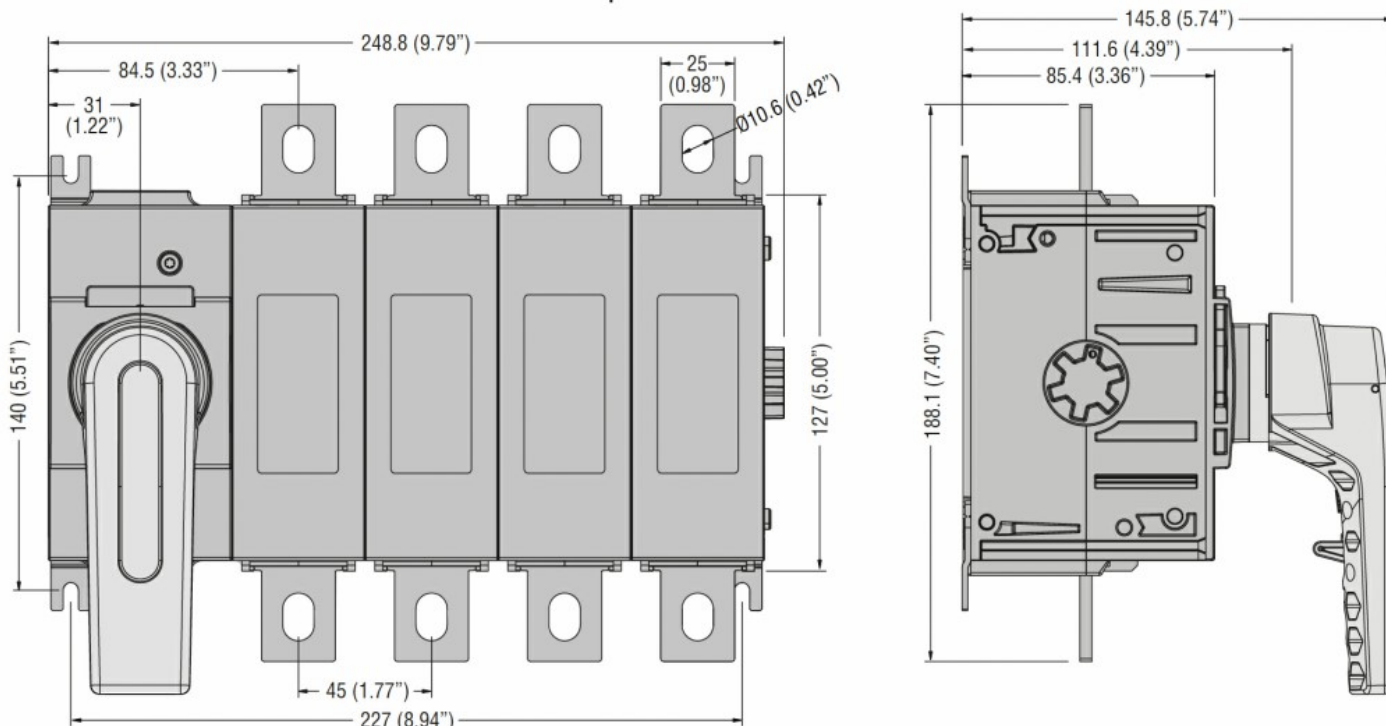

#### Wiring diagrams



#### Certifications and compliance

##### Compliance

IEC/EN 60947-1

IEC/EN 60947-3

#### ETIM classification

ETIM 8.0

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology