




**Contact characteristics**

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	630
Rated insulation voltage $U_i$ IEC/EN	V	1000
Rated impulse withstand voltage $U_{imp}$	kV	12
Reactive power for control of capacitors at Rated short time current (0.3s) $I_{cw}$ (rms)	kA	0

**Dimensions**

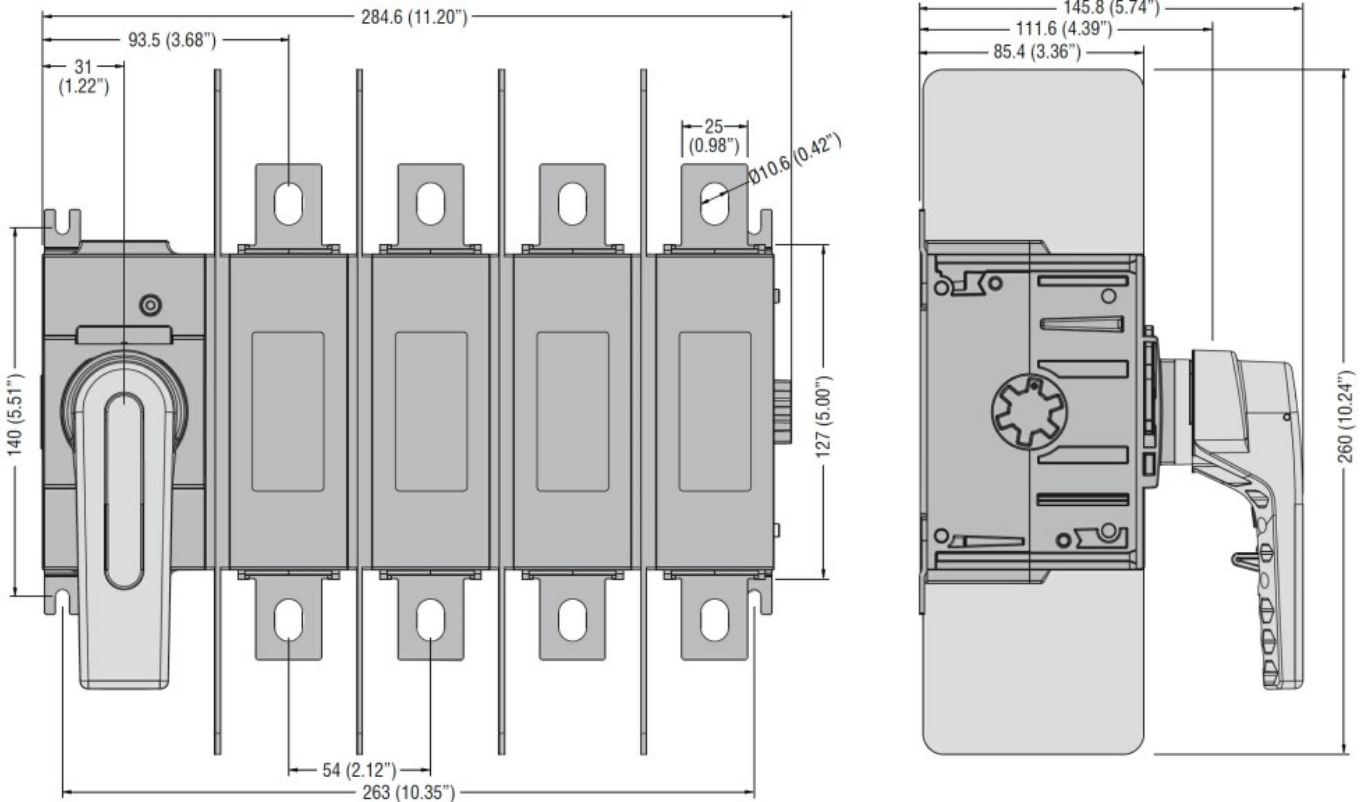

**Wiring diagrams**



**Certifications and compliance**

**Compliance**

IEC/EN 60947-1  
IEC/EN 60947-3

---

ETIM classification

ETIM 8.0

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology