



**Contact characteristics**

Rated insulation voltage $U_i$ IEC/EN	V	250
Rated impulse withstand voltage $U_{imp}$	kV	4

**Coil characteristics**

Relay control voltage + socket	V	12...24VAC/DC
--------------------------------	---	---------------


**Mechanical features**

Socket screw tightening tool (cross / flat blade)	Phillips 0/3.5mm
---	------------------


Conductor section	AWG/Kcmil	min	20
		max	16
	IEC	min	mm <sup>2</sup> 0.5
		max	mm <sup>2</sup> 1.5

Fixing	On 35mm DIN rail
--------	------------------

**Dimensions**

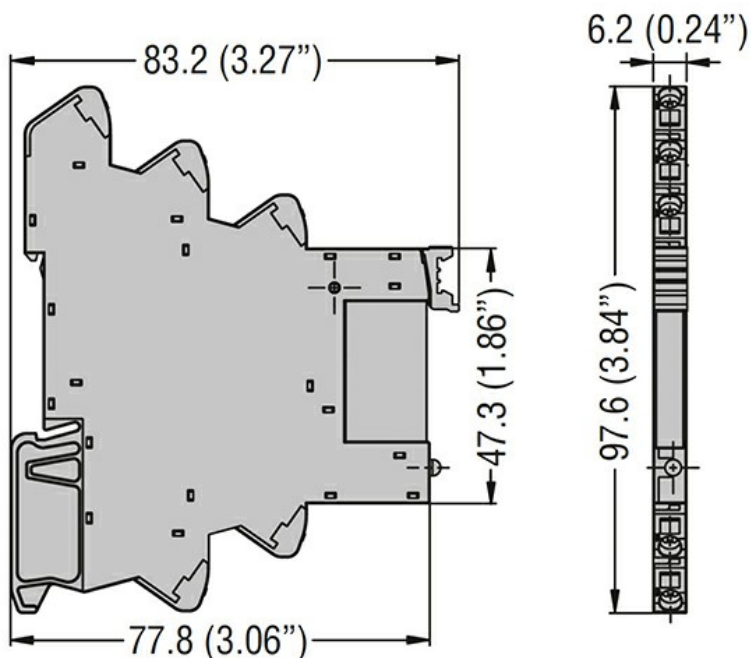

**Wiring diagrams**

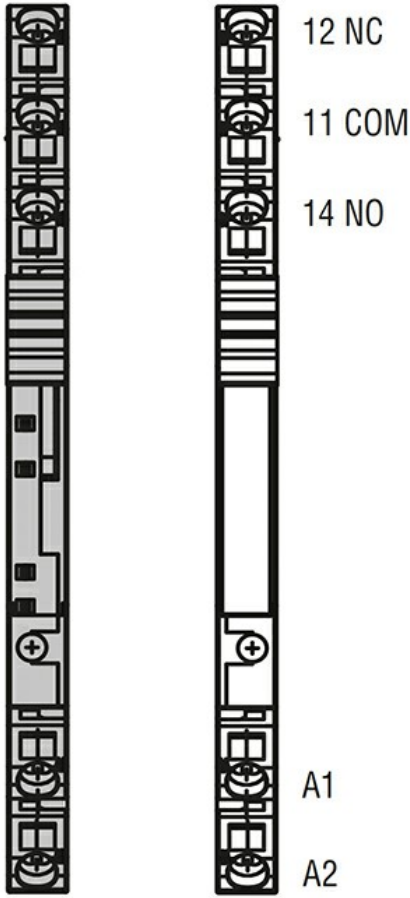

**Certifications and compliance**

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

**ETIM classification**

ETIM 8.0

EC001456 -  
 Relay socket