



Contact characteristics

Rated insulation voltage U_i IEC/EN	V	250
Rated impulse withstand voltage U_{imp}	kV	4

Coil characteristics

Relay control voltage + socket	V	110... 125VAC/DC
--------------------------------	---	---------------------

Mechanical features


Max socket terminal tightening torque	Nm	0.5Nm
Socket screw tightening tool (cross / flat blade)		Phillips 0/3.5mm

Conductor section


AWG/Kcmil	min	max
	20	16
IEC	min	max
	mm ² 0.5	mm ² 1.5

Fixing On 35mm DIN rail

Dimensions

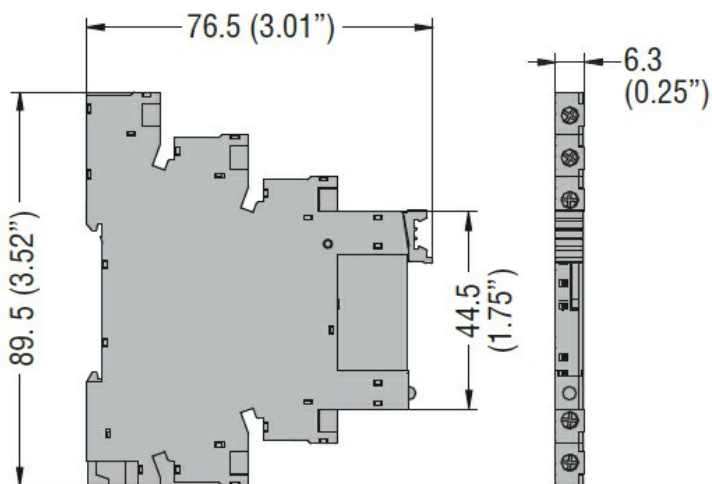

Wiring diagrams

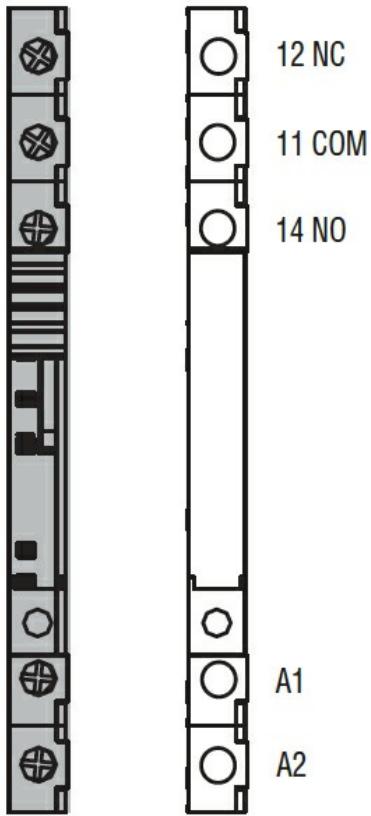

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

ETIM classification

ETIM 8.0

EC001456 -
 Relay socket