



### Contact characteristics

Rated insulation voltage $U_i$ IEC/EN	V	250
Rated impulse withstand voltage $U_{imp}$	kV	4

### Coil characteristics

Relay control voltage + socket	V	220... 240VAC/DC
--------------------------------	---	---------------------

### Mechanical features

Max socket terminal tightening torque	Nm	0.5Nm
Socket screw tightening tool (cross / flat blade)		Phillips 0/3.5mm
Conductor section		

AWG/Kcmil


min	20
max	16

IEC


min	mm <sup>2</sup>	0.5
max	mm <sup>2</sup>	1.5

Fixing On 35mm DIN rail

### Dimensions

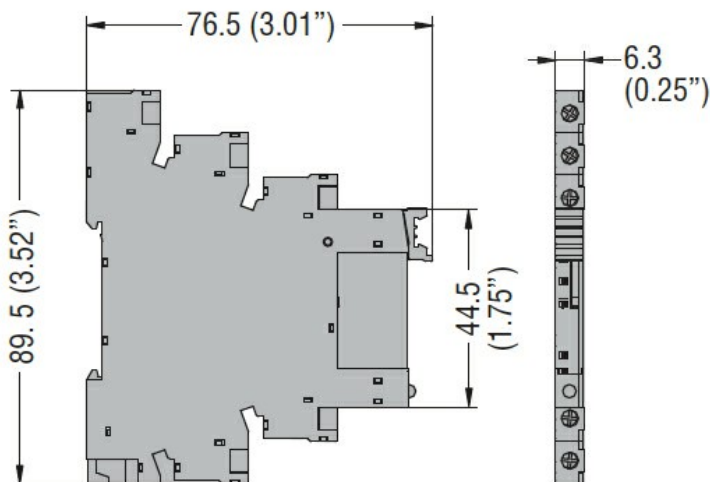

### Wiring diagrams

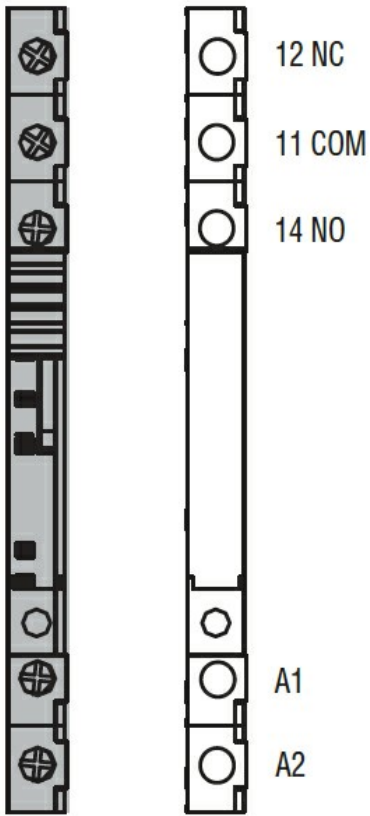

**Certifications and compliance**

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

**ETIM classification**

ETIM 8.0

EC001456 -  
 Relay socket