



Contact characteristics

Rated insulation voltage U_i IEC/EN	V	250
Rated impulse withstand voltage U_{imp}	kV	4

Coil characteristics

Relay control voltage + socket	V	220... 240VAC/DC
--------------------------------	---	---------------------


Mechanical features

Socket screw tightening tool (cross / flat blade)	Phillips 0/3.5mm
---	------------------


Conductor section			
	AWG/Kcmil	min	20
		max	16
	IEC	min	mm ² 0.5
		max	mm ² 1.5

Fixing	On 35mm DIN rail
--------	------------------

Dimensions

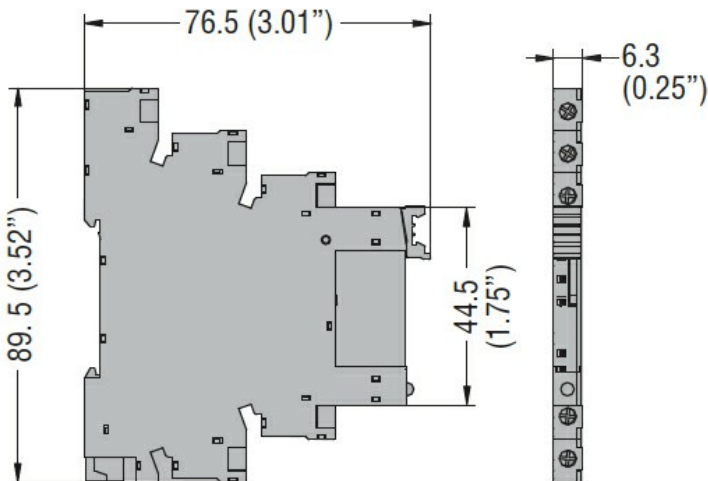

Wiring diagrams

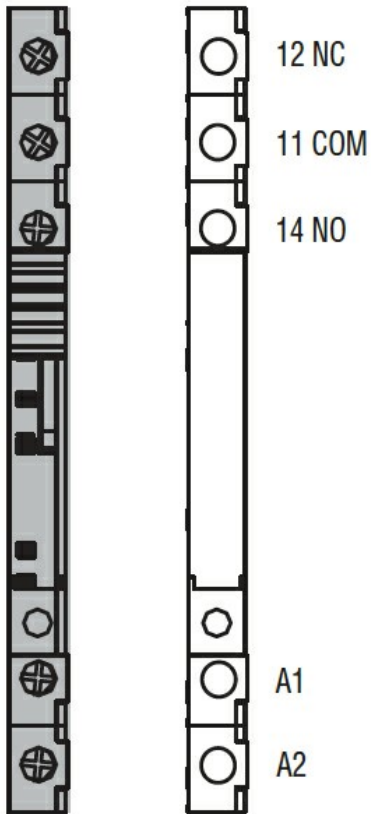

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

ETIM classification

ETIM 8.0

EC001456 -
 Relay socket