



Contact characteristics

Contact configuration				2 C/O
Rated insulation voltage U_i IEC/EN	V			250
Rated impulse withstand voltage U_{imp}	kV			6
IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A			8
Maximum instantaneous current	A			20
Rated current (I_n)	A			8
Max contrrollable power in		AC-1	W	2000
		AC-15	VA	150
Rated operating power AC-1			VA	2000
Rated operating power AC-15				
		230 VAC	VA	150
Single-phase motor control				
		230VAC	kW	0.2
Rated operating current DC-1				
		30V	A	8
		110V	A	0.3
		220V	A	0.1
Minimum switching load	V / mA			5 / 100
Contact impedance	m Ω			100
Contact material				AgSnO ₂

Operating times

Closing	ms			10
Opening	ms			5

Operations

Mechanical life	cycles			10000000
Electrical life AC1	cycles			50000

Coil characteristics

Relay control voltage	V			110...120VAC
Average coil consumption AC at 20°C	VA			0.9
Average coil consumption DC at 20°C	W			0.45
Operating range		Closing	% U_n	70...110
		Opening	% U_n	20...55
Maximum cycle frequency	cycles/h			3600

Mechanical features

Max socket terminal tightening torque	Nm			0.6
Socket screw tightening tool (cross / flat blade)				PH1 / 4.5mm
Conductor section				
	AWG/Kcmil			
		min		20
		max		14
	IEC			

	min	mm ²	0.5
	max	mm ²	2.5
Operating position	normal		Any
Fixing			On 35mm DIN rail and with screw


Ambient conditions

Temperature	Operating temperature	min	°C	-40
		max	°C	+85
	Storage temperature	min	°C	-40
		max	°C	+85


Other features

Indication	No
Mechanical contact position indicator	No
Mechanical test actuator	No


Dimensions

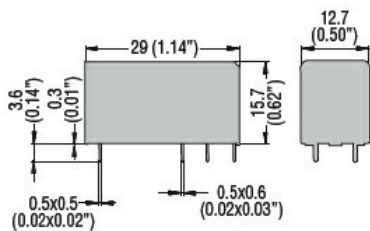

PCB layout

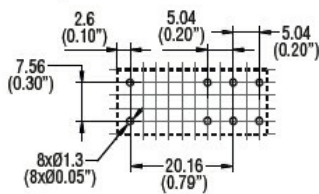

Wiring diagrams

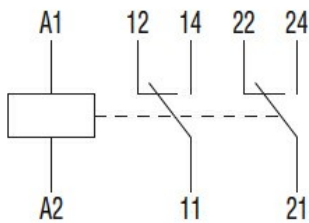

Certifications and compliance

Compliance	IEC/EN 61810
Certificates	CSA
	cULus
	cURus
	EAC
	VDE

ETIM classification

ETIM 8.0

EC001437 -
Switching relay