
# SOCKET FOR RELAY WITH 2 C/O CONTACTS, SCREW TERMINALS, CONTACT TERMINALS ALL ON UPPER SIDE



| Product designation                               |     |     | SOCKET           |
|---|-----|-----|------------------|
| Product type designation                          |     |     | HR6XS21          |
| Contact characteristics                           |     |     |                  |
| Rated insulation voltage Ui IEC/EN                |     | V   | 250              |
| Rated impulse withstand voltage Uimp              |     | kV  | 4                |
| Mechanical features                               |     |     |                  |
| Socket screw tightening tool (cross / flat blade) |     |     | Phillips 1/4.5mm |
| Conductor section                                 |     |     |                  |
| AWG/Kcmil   |     |     |                  |
|   | min |     | 20               |
|   | max |     | 14               |
| IEC   |     |     |                  |
|   | min | mm² | 0.5              |
|   | max | mm² | 2.5              |
|   |     |     | On 35mm DIN      |
| Fixing  |     |     | rail and with    |
|   |     |     | screw            |


### **Dimensions**

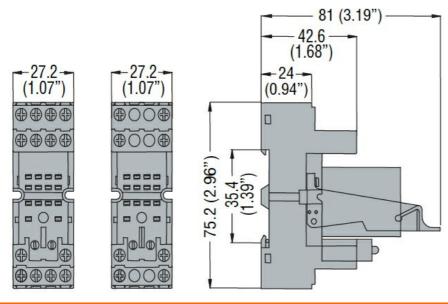


#### Wiring diagrams

**ENERGY AND AUTOMATION** 

# SOCKET FOR RELAY WITH 2 C/O CONTACTS, SCREW TERMINALS, CONTACT TERMINALS ALL ON UPPER SIDE

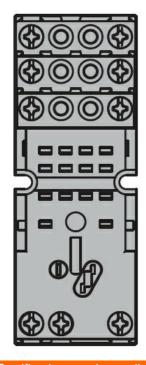

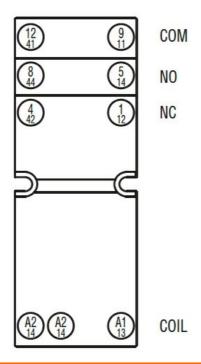

## Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

### ETIM classification

ETIM 8.0

EC001456 -Relay socket