



**Contact characteristics**

Rated insulation voltage $U_i$ IEC/EN	V	250
Rated impulse withstand voltage $U_{imp}$	kV	4

**Mechanical features**


Max socket terminal tightening torque	Nm	0.6Nm
Socket screw tightening tool (cross / flat blade)		Phillips 1/4.5mm

Conductor section


AWG/Kcmil	min		20
	max		14
IEC	min	mm <sup>2</sup>	0.5
	max	mm <sup>2</sup>	2.5

Fixing	On 35mm DIN rail and with screw
--------	---------------------------------

**Dimensions**

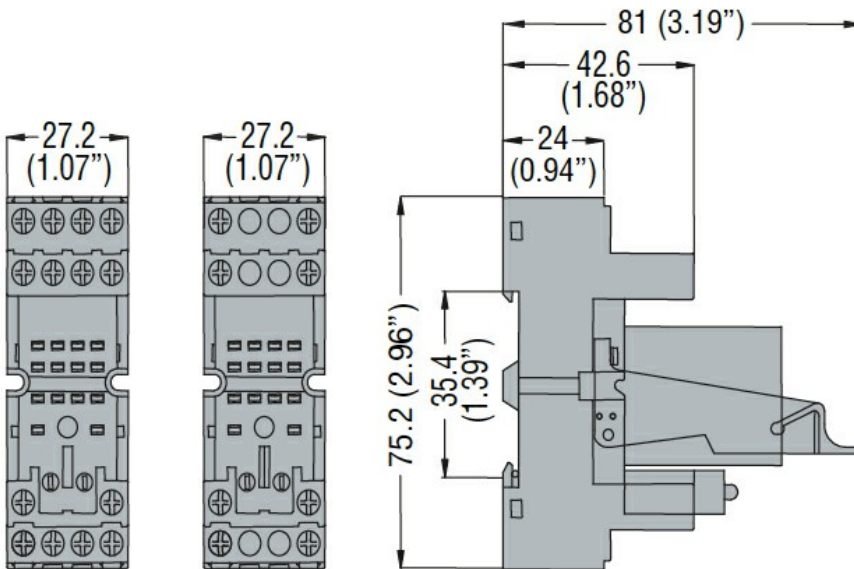

**Wiring diagrams**

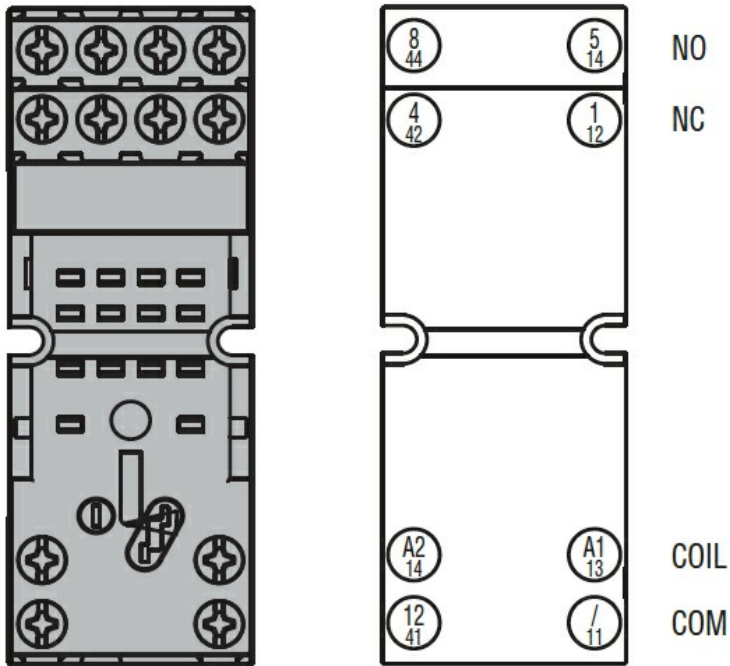

**Certifications and compliance**

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

**ETIM classification**

ETIM 8.0

EC001456 -  
Relay socket