



### Input characteristics

Control voltage		4...32VDC
Operating voltage limits		
	Operating voltage pick-up	V 4
	Operating voltage drop-out	V 2
Input current at min...max voltage	mA	27...37

### Operating times

Switching-on	Half cycle max
Switching-off	Half cycle max

### Output characteristics

Static output type		SCR (silicon controlled rectifier)
Switching mode		Zero crossing
Rated operating voltage	VAC	48...600
Blocking voltage	V	1200
Operational frequency (min...max)	Hz	45...65
Rated operating current AC-51 (resistive load) at 40°C	A	50
Rated operating current AC-53 (motor load) at 40°C	A	15
Non repetitive surge peak on state current t=10ms	A	530
Off state leakage current	mA	1
On state output voltage drop	V	1.2
Critical rate of rise of off-state voltage dv/dt	V/μs	1000
Input - Output isolation	V	5000
Input - Output to metal base	V	5000
Output protection type		VDR
I2t	A2s	1404

### Terminal characteristics

Control terminals	Type	Screw
Terminals tool		Blade 3.5mm
Tightening torque control terminals	Nm	0.6Nm
	Ibin	5.3
Conductor section connectable (control terminals) with 1 or 2 wires min...max		
	AWG stranded	n° 30...14
	Flexible w/o lug	mm2 0.05...2
	Flexible c/w insulated spade lug	mm2 0.05...2
Load terminals	Type	Screw
Load terminals tool		PH2
Tightening torque load terminals	Nm	1.5
	Ibin	13.3
Conductor section connectable (load terminals) with 1 or 2 wires min...max		
	AWG stranded	n° 18...10
	Flexible w/o lug	mm2 1...6

Flexible c/w insulated spade lug mm2 1...16


Operating position	allowable	On vertical plane
Fixing		Screw

**Ambient conditions**

Temperature	Operating temperature	min °C	-40
		max °C	+80
	Storage temperature	min °C	-40
		max °C	+130

**Dimensions**

**Wiring diagrams**

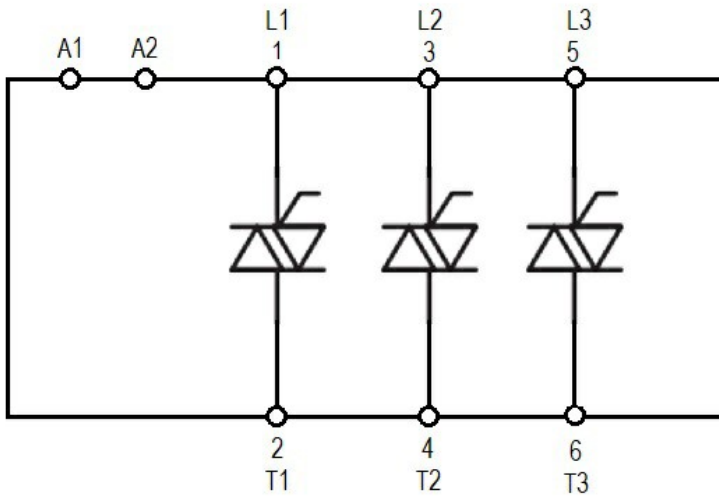

**Certifications and compliance**

**Certifications**

IEC/EN/BS 61000-6-2; IEC/EN/BS 61000-6-3

**ETIM classification**

EC000066 - Power contactor, AC switching