



General characteristics

Material

Housing

Rod

Polymer
thermoplastic
Aluminium-zinc
alloy

Contact characteristics


Type of contact			1NO+1NC Snap action
Thermal current Ith	A		10
IEC/EN 60947-5-1 designation			A600 Q600
Rated insulation voltage Ui	V		690
Rated impulse withstand voltage Uimp	kV		6
Insulation class			II
Short-circuit protection with fuse	Class/A		10 gG/SC QUICK FUSE
Switching speed	min max	m/s m/s	0.5 1.5
IEC Conventional free air thermal current Ith ≤ 40°C	A		10
Resistance per pole (average value)	mΩ		<10

Mechanical features

Operating head fixing			Locking bayonet insert
Operating torque		Ncm ozin	3 4.25
Tightening torque (Max)			
Switch fixing		Nm lbin	2.5 22.1
Contact terminals		Nm lbin	0.8 7
Body lid screw fixing		Nm lbin	0.8 7
Conductor section			
AWG/Kcmil	min max		16 14
IEC	min max	mm ² mm ²	1.5 2.5
Cable connection			Self-releasing screw terminal


Cable entry			M20 on the bottom	
Operations				
Mechanical life			cycles	<10000000
Mechanical operation			cycles/h	3600
Ambient conditions				
Temperature				
Operating temperature		min	°C	-25
		max	°C	+70
Storage temperature		min	°C	-40
		max	°C	+70
Resistance & Protection				
IP degree			Terminals	IP20
			Body housing	IP65
Pollution degree			3	
Dimensions				

Dimensions

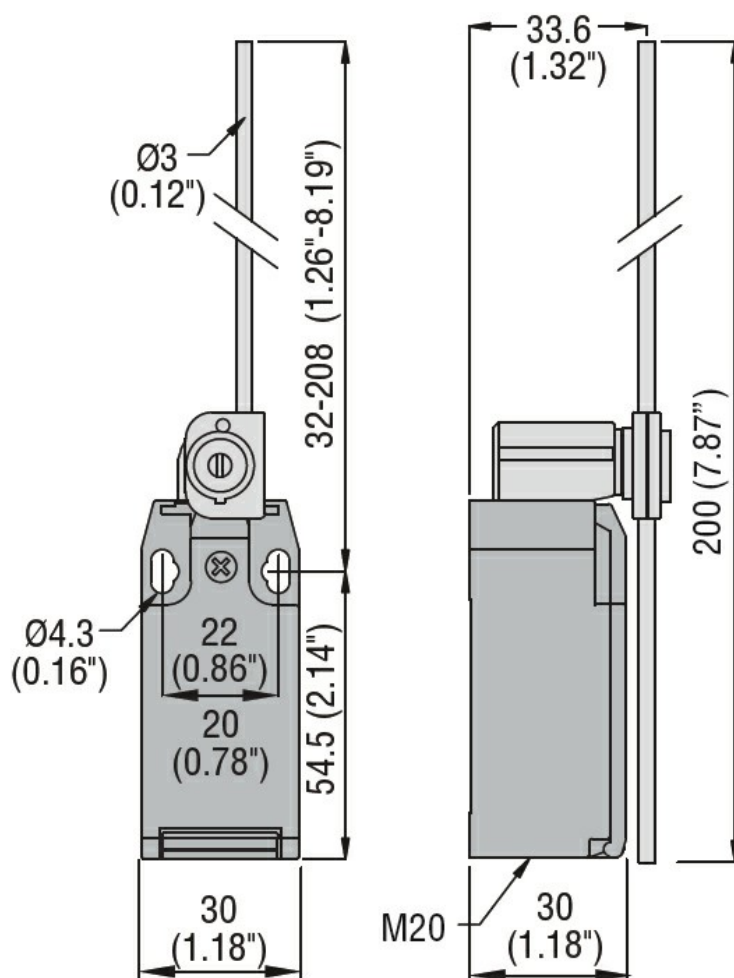

Wiring diagrams

Snap action

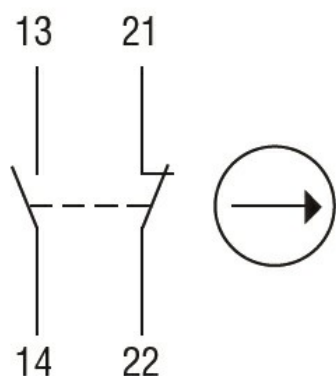

1NO + 1NC

Certifications and compliance

Compliance

CSA C22.2 n° 14

EN 50047

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch