



General characteristics

Material

Housing

Aluminium-zinc
alloy

Roller

Plastic

Contact characteristics

Type of contact			2NC Slow action
Thermal current I _{th}	A		10
IEC/EN 60947-5-1 designation			A300 Q300
Rated insulation voltage U _i	V		440
Rated impulse withstand voltage U _{imp}	kV		4
Short-circuit protection with fuse	Class/A		10 gG/SC QUICK FUSE
Switching speed	min max	m/s m/s	0.5 1.5
IEC Conventional free air thermal current I _{th} ≤ 40°C	A		10
Resistance per pole (average value)	mΩ		<10


Mechanical features

Operating head fixing			Locking bayonet insert
Operating torque	N lb		5 1.1
Tightening torque (Max)			
Switch fixing	Nm lbin		2.5 22.1
Contact terminals	Nm lbin		0.8 7
Body lid screw fixing	Nm lbin		0.8 7
Conductor section			
AWG/Kcmil	min max		16 14
IEC	min max	mm ² mm ²	1.5 2.5
Cable connection			Self-releasing screw terminal
Cable entry			M20 on the sides

Operations


Mechanical life	cycles	<10000000
-----------------	--------	-----------

Mechanical operation	cycles/h			3600
Ambient conditions				
Temperature				
Operating temperature		min	°C	-25
		max	°C	+70
Storage temperature				
		min	°C	-40
		max	°C	+70
Resistance & Protection				
IP degree				
		Terminals	IP20	
		Body housing	IP65	
Pollution degree			3	
Dimensions				

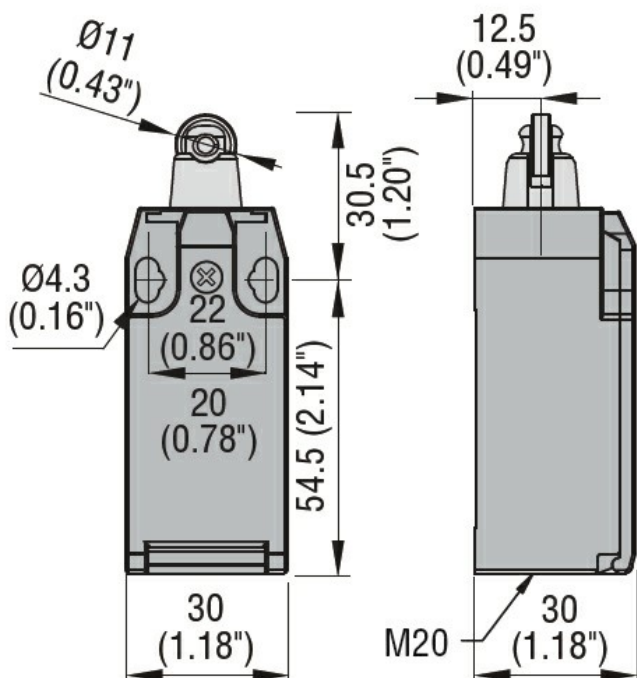

Wiring diagrams

Slow action

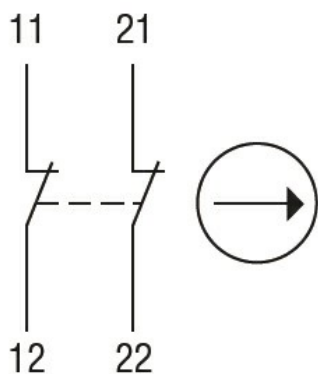

2NC

Certifications and compliance

Compliance

CSA C22.2 n° 14

EN 50047

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch