



General characteristics

Material

Housing

Aluminium-zinc
alloy

Rod

Aluminium-zinc
alloy

Contact characteristics

Type of contact

1NO+1NC Slow
action make
before break

Thermal current Ith

A

10

IEC/EN 60947-5-1 designation

A300 Q300

Rated insulation voltage Ui

V

440

Rated impulse withstand voltage Uimp

kV

4

Insulation class

II

Short-circuit protection with fuse

Class/A

10 gG/SC
QUICK FUSE

Switching speed

min
max

m/s
m/s

0.5
1.5

IEC Conventional free air thermal current Ith ≤ 40°C

A

10

Resistance per pole (average value)

mΩ

<10

Mechanical features

Operating head fixing

Locking bayonet
insert

Operating torque

N
lb

5
1.1

Tightening torque (Max)

Switch fixing

Nm
lbin

2.5
22.1

Contact terminals

Nm
lbin

0.8
7

Body lid screw fixing

Nm
lbin

0.8
7

Conductor section

AWG/Kcmil

min
max

16
14

IEC

min
max

mm²
mm²

1.5
2.5

LIMIT SWITCH, K SERIES, TOP PUSH ROD PLUNGER, 2 SIDE CABLE ENTRY. DIMENSIONS
COMPATIBLE TO EN 50047, METAL BODY, CONTACTS 1NO+1NC SLOW ACTION MAKE
BEFORE BREAK. METAL PLUNGER

Cable connection	Self-releasing screw terminal
Cable entry	M20 on the sides

Operations

Mechanical life	cycles	<10000000
Mechanical operation	cycles/h	3600


Ambient conditions

Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+70

Resistance & Protection


IP degree		Terminals	IP20
		Body housing	IP65
Pollution degree			3

Dimensions

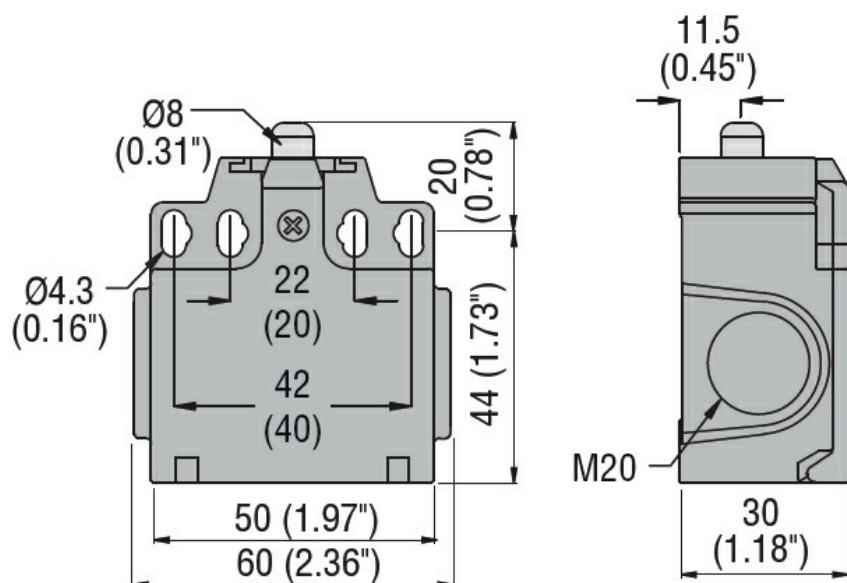

Wiring diagrams

Slow action

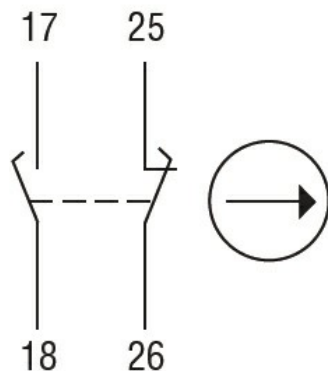

1NO + 1NC
make before break

Certifications and compliance

Compliance

CSA C22.2 n° 14
EN 50047
IEC/EN 60204-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch