



## General characteristics

### Material

|         |                      |
|---------|----------------------|
| Housing | Aluminium-zinc alloy |
| Roller  | Plastic              |

## Contact characteristics

|                                                      |            |                          |
|------------------------------------------------------|------------|--------------------------|
| Type of contact                                      |            | 1NO+1NC Snap action      |
| Thermal current Ith                                  | A          | 10                       |
| IEC/EN 60947-5-1 designation                         |            | A300 Q300                |
| Rated insulation voltage Ui                          | V          | 440                      |
| Rated impulse withstand voltage Uimp                 | kV         | 4                        |
| Short-circuit protection with fuse                   | Class/A    | 10 gG/SC QUICK FUSE      |
| Switching speed                                      | min<br>max | m/s<br>m/s<br>0.5<br>1.5 |
| IEC Conventional free air thermal current Ith ≤ 40°C | A          | 10                       |
| Resistance per pole (average value)                  | mΩ         | <10                      |

## Mechanical features

|                         |            |                                                  |
|-------------------------|------------|--------------------------------------------------|
| Operating head fixing   |            | Locking bayonet insert                           |
| Operating torque        | N<br>lb    | 6<br>1.34                                        |
| Tightening torque (Max) |            |                                                  |
| Switch fixing           | Nm<br>lbin | 2.5<br>22.1                                      |
| Contact terminals       | Nm<br>lbin | 0.8<br>7                                         |
| Body lid screw fixing   | Nm<br>lbin | 0.8<br>7                                         |
| Conductor section       |            |                                                  |
| AWG/Kcmil               | min<br>max | 16<br>14                                         |
| IEC                     | min<br>max | mm <sup>2</sup><br>mm <sup>2</sup><br>1.5<br>2.5 |
| Cable connection        |            | Self-releasing screw terminal                    |
| Cable entry             |            | M20 on the sides                                 |

## Operations

|                      |          |           |
|----------------------|----------|-----------|
| Mechanical life      | cycles   | <10000000 |
| Mechanical operation | cycles/h | 3600      |


#### Ambient conditions

|             |                       |     |    |     |
|-------------|-----------------------|-----|----|-----|
| Temperature | Operating temperature | min | °C | -25 |
|             |                       | max | °C | +70 |
|             | Storage temperature   | min | °C | -40 |
|             |                       | max | °C | +70 |

#### Resistance & Protection


|                  |              |      |
|------------------|--------------|------|
| IP degree        | Terminals    | IP20 |
|                  | Body housing | IP65 |
| Pollution degree |              | 3    |

#### Dimensions

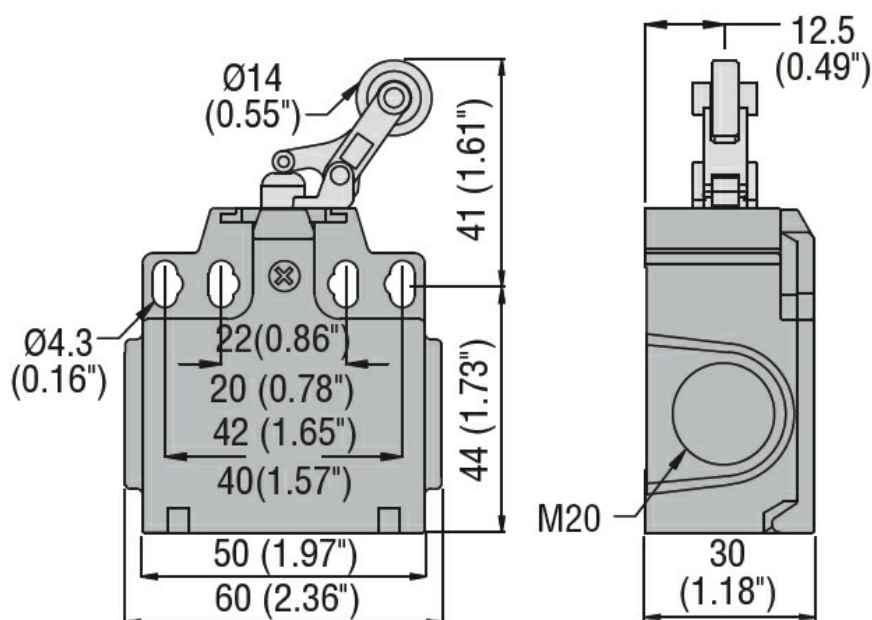

#### Wiring diagrams

### Snap action

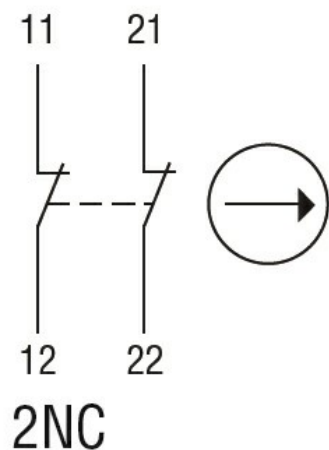

#### Certifications and compliance

Compliance

CSA C22.2 n° 14

EN 50047

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000030 - End  
switch