



General characteristics

Colour	Grey/Yellow with red mushroom	
Type of positions	Pull to release	
Resistance value	KΩ	≤0.025
Material	PC-ABS for button and control station. Chrome-plasted zamak for metal operator frame	
IEC degree of protection	IP65	

Electrical characteristics



Rated insulation voltage Ui IEC/EN	V	690	
IEC Conventional free air thermal current Ith ≤ 40°C	A	10	
Rated frequency	Hz	50	
Conductivity	5V 10mA		
UL/CSA and IEC/EN 60947-5-1 designation	A600 Q300		
Operating current AC15	12V	A	6
	24V	A	6
	48V	A	6
	120V	A	6
	240V	A	3
	400V	A	1.9
	480V	A	1.5
	500V	A	1.4
	600V	A	1.2
Operating current DC13	12V	A	3
	24V	A	3
	48V	A	1.5
	125V	A	0.55
	250V	A	0.27
	440V	A	0.15
	500V	A	0.13
	600V	A	0.1

Mechanical features


Operating force	kg-lb	≤2.6Nm	
Mechanical life	cycles	1000000	
Tightening torque for terminals max	Nm	0.5 ... 0.8 Nm	
Conductor section	IEC		
	min	mm²	0.5
	max	mm²	2.5
Operating position			

		allowable	Any
Ambient conditions			
Temperature			
Operating temperature		min	°C -25
		max	°C +75
Storage temperature			
		min	°C -40
		max	°C +85

Dimensions

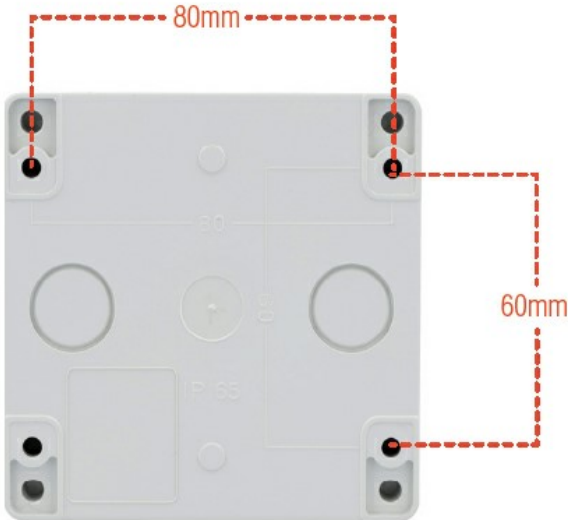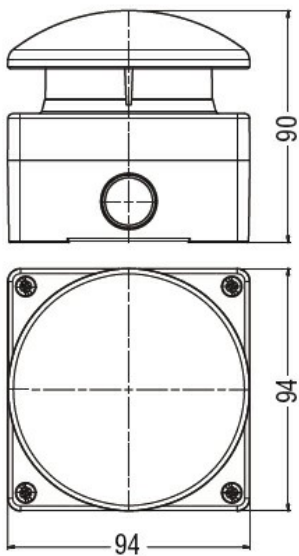

Wiring diagrams



Certifications and compliance

Compliance		IEC60947-5-1
Certificates		/

ETIM classification

ETIM 8.0	EC002034 - Emergency stop complete
----------	--