
**ENERGY AND AUTOMATION** 

SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3 POSITION, 1 > 0 - 2. WITHDRAL AT 2



Product designation			Selector switch actuator key - 3 position
Product type designation			LPCS38
General characteristics			
Colour			Black
Type of positions			Selector switch
Material			Polyamide
IEC degree of protection			IP66, IP67 and IP69K
Mechanical features			
Mechanical life		cycles	1000000
Mounting adapter			LPXAU120
Weight		g	60
UL technical data			
UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+85
Dimensions			

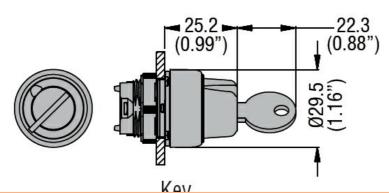

Certificat	ions and	comp	liance
Cortilloat	iono ana	COLLIP	iidi ioo

Com	nlia	nce
COIII	pna	1100

CSA C22.2 n° 14 IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

## Certificates

CCC

cULus





SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3 POSITION, 1 > 0 - 2. WITHDRAL AT 2

ETIM classification

**ETIM 8.0** 

EC000222 -Front element for selector switch