



#### General characteristics

|                          |                          |
|--------------------------|--------------------------|
| Colour                   | Black                    |
| Type of positions        | 1 - 0 < 2                |
| Material                 | Aluminium and zinc alloy |
| IEC degree of protection | IP66, IP67 and IP69K     |

#### Mechanical features

|                  |                          |         |
|------------------|--------------------------|---------|
| Mechanical life  | cycles                   | 1000000 |
| Fixing           | Without mounting adapter |         |
| Mounting adapter | LPXAU120M                |         |


#### UL technical data

|                         |                              |
|-------------------------|------------------------------|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |
|-------------------------|------------------------------|

#### Ambient conditions

|             |                       |    |     |
|-------------|-----------------------|----|-----|
| Temperature | Operating temperature |    |     |
|             | min                   | °C | -25 |
|             | max                   | °C | +70 |
|             | Storage temperature   |    |     |
|             | min                   | °C | -40 |
|             | max                   | °C | +85 |

#### Dimensions

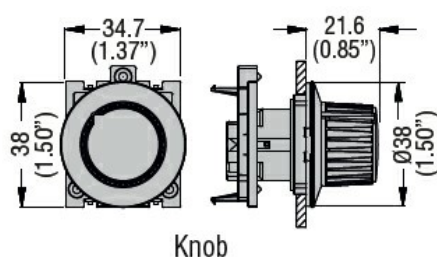

#### Certifications and compliance

|            |                     |
|------------|---------------------|
| Compliance | CSA C22.2 n° 14     |
|            | IEC/EN/BS 60947-1   |
|            | IEC/EN/BS 60947-5-1 |
|            | UL508               |

|              |       |
|--------------|-------|
| Certificates | cULus |
|--------------|-------|

#### ETIM classification

|          |                           |
|----------|---------------------------|
| ETIM 8.0 | EC002611 - Control switch |
|----------|---------------------------|