



General characteristics

Colour	Green
Type of positions	Monoblock pilot light
Material	Polyamide
IEC degree of protection	IP66, IP67 and IP69K on front; IP20 on rear

Electrical characteristics

Rated frequency	Hz	50-60
Supply voltage (DC)	V	220 (-15% ... +10% Ue)

Operations

Electrical life	hours	>30000
-----------------	-------	--------

Mechanical features

Tightening torque for terminals max		Nm	0.8
Conductor section			
AWG/kcmil conductor section			
		min	18
		max	16
IEC			
		min	mm ² 0.5
		max	mm ² 2.5

Weight	g	24
--------	---	----


UL technical data

UL degree of protection	Type1, 2, 3R, 4, 4X, 12, 12K on front
-------------------------	---------------------------------------


Ambient conditions

Temperature	Operating temperature		
	min	°C	-25
	max	°C	+70

Dimensions

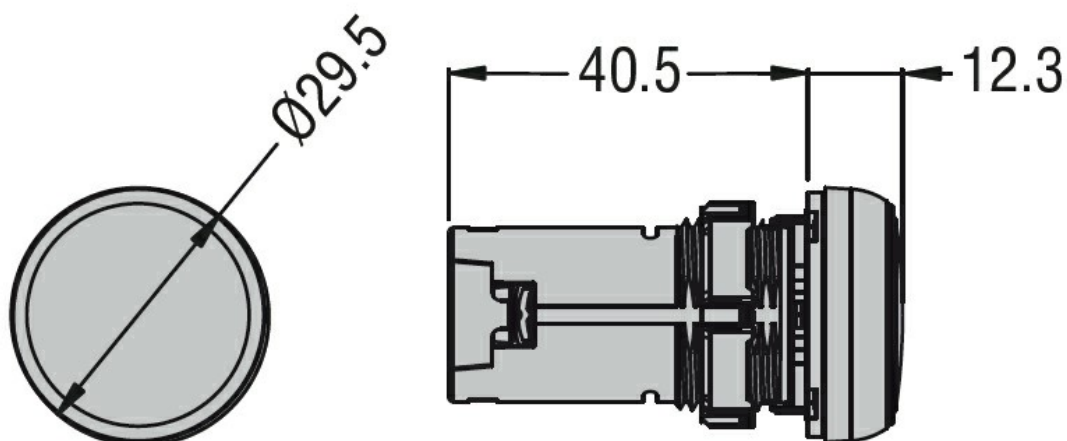

Wiring diagrams

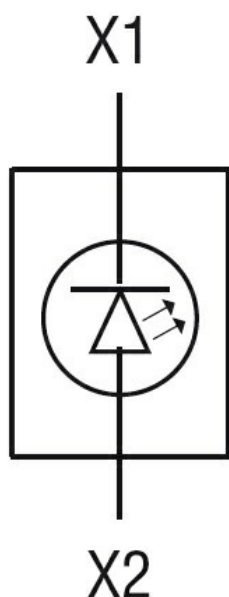

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC000272 -
Indicator light
complete