



Electrical characteristics

Rated insulation voltage U_i IEC/EN	V	690
IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	10
Conductivity		1mA 5V
UL/CSA and IEC/EN 60947-5-1 designation		A600 Q600
Operating current AC15		
	12V	A 6
	24V	A 6
	48V	A 6
	120V	A 6
	240V	A 6
	400V	A 3
	480V	A 1.5
	500V	A 1.4
	600V	A 1.2

Operating current DC13		
	12V	A 3
	24V	A 3
	48V	A 1.5
	125V	A 0.55
	250V	A 0.27
	440V	A 0.15
	500V	A 0.13
	600V	A 0.1

Contact resistance	mΩ	≤20
--------------------	----	-----

Operations

Electrical life	cycles	1000000
-----------------	--------	---------

Mechanical features

Operating force	kg-lb	≤0.5Kg/1.1lb
Tightening torque for terminals max	Nm	1
Terminals screw		Screw

Conductor section		
AWG/kcmil conductor section		
	max	14
IEC		
	max	mm ² 1 or 2 / 2.5

Mounting adapter		LPXAU120; LPXAU120M
------------------	--	------------------------


Weight	g	11
--------	---	----

Ambient conditions

Temperature		
Operating temperature		
	min	°C -25
	max	°C +70
Storage temperature		

min °C -40
max °C +85

Dimensions

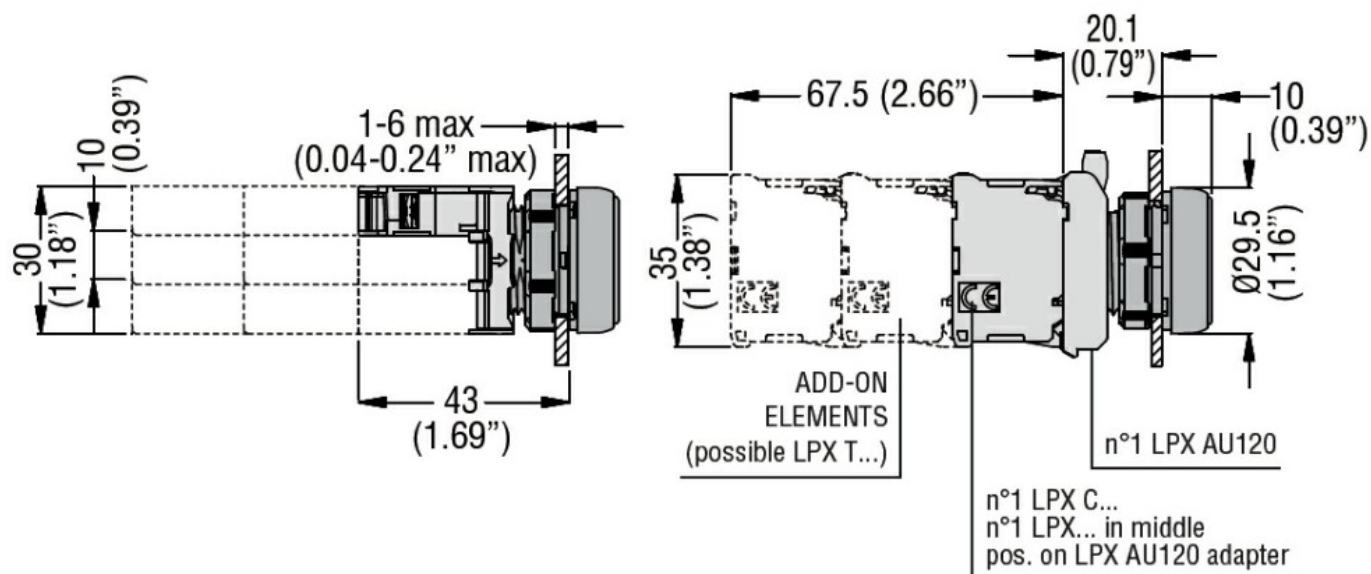

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

CCC
cULus
EAC
RINA

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block