




General characteristics					
Colour			Red		
Electrical characteristics					
Supply voltage (AC)			V	185...265	
Operations					
Electrical life			hours	100000	
Mechanical features					
Tightening torque for terminals max			Nm	1	
Conductor section			AWG/kcmil conductor section		
			max		
			12		
			IEC		
			max	mm²	1 or 2 / 2.5
Mounting adapter			LPXAU120		
Weight			g	16	
Ambient conditions					
Temperature			Operating temperature		
			min	°C	-25
			max	°C	+70
			Storage temperature		
			min	°C	-40
			max	°C	+85

Dimensions

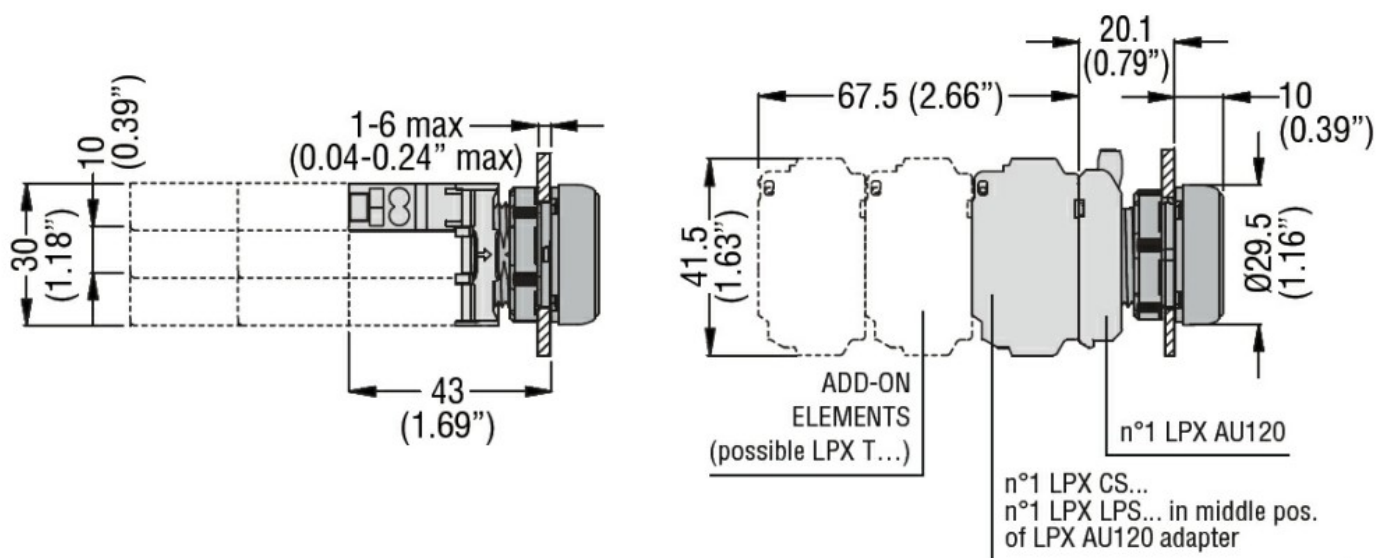

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

CCC
cULus
EAC
RINA
UL

ETIM classification

ETIM 8.0

EC000204 -
Lamp holder
block for control
circuit devices