





| General characteristics             |  |                             |          |              |
|-------------------------------------|--|-----------------------------|----------|--------------|
| Colour                              |  |                             | White    |              |
| Electrical characteristics          |  |                             |          |              |
| Supply voltage (AC)                 |  |                             | V        | 185...265    |
| Operations                          |  |                             |          |              |
| Electrical life                     |  |                             | hours    | 100000       |
| Mechanical features                 |  |                             |          |              |
| Tightening torque for terminals max |  |                             | Nm       | 1            |
| Conductor section                   |  | AWG/kcmil conductor section |          |              |
|                                     |  | max                         |          | 12           |
|                                     |  | IEC                         |          |              |
|                                     |  | max                         | mm²      | 1 or 2 / 2.5 |
| Mounting adapter                    |  |                             | LPXAU120 |              |
| Weight                              |  |                             | g        | 16           |
| Ambient conditions                  |  |                             |          |              |
| Temperature                         |  |                             |          |              |
|                                     |  | Operating temperature       |          |              |
|                                     |  | min                         | °C       | -25          |
|                                     |  | max                         | °C       | +70          |
|                                     |  | Storage temperature         |          |              |
|                                     |  | min                         | °C       | -40          |
|                                     |  | max                         | °C       | +85          |

## Dimensions

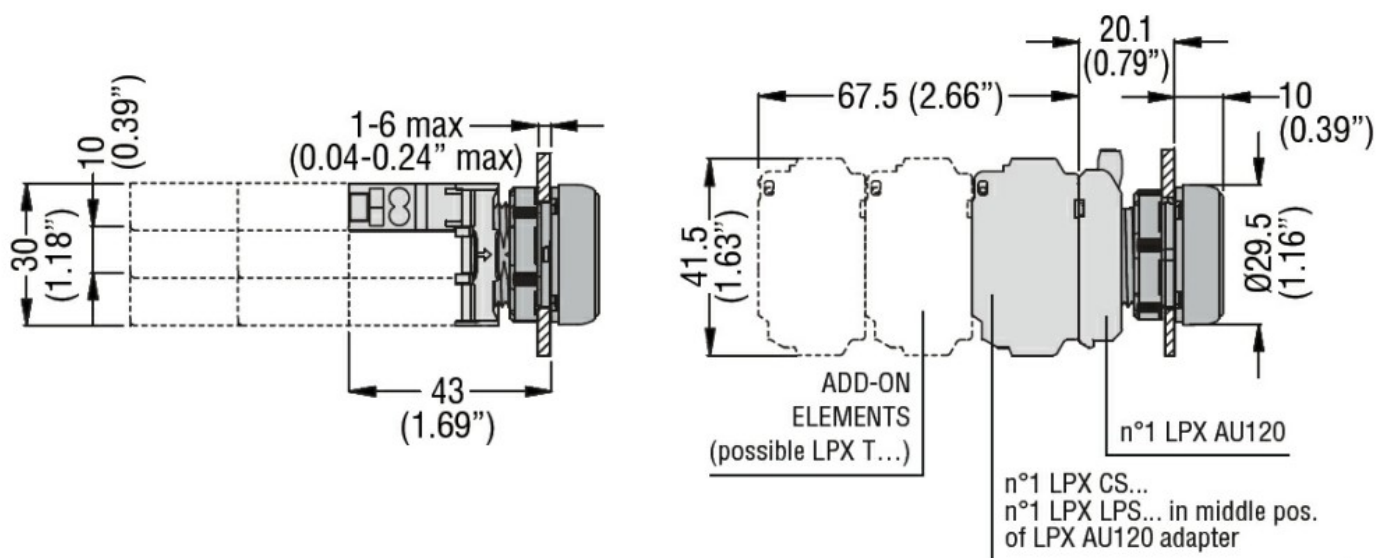

## Wiring diagrams

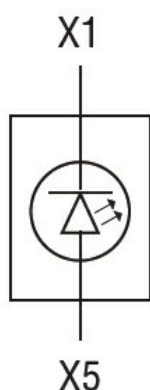

## Certifications and compliance

### Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

### Certificates

CCC

cULus

EAC

RINA

UL

## ETIM classification

ETIM 8.0

EC000204 -  
Lamp holder  
block for control  
circuit devices