



General characteristics

Material	Aluminium and zinc alloy
IEC degree of protection	IP65


Mechanical features

Mechanical life	cycles	300000
Weight	g	70

Ambient conditions

Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70

Dimensions

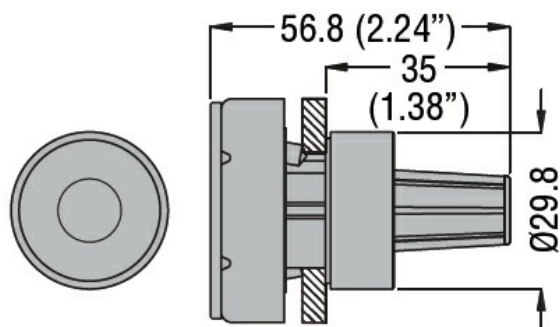

Certifications and compliance

Compliance	
	IEC/EN 60947-1
	IEC/EN 60947-5-1
Certificates	
	CCC
	EAC

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology