



Operations

Electrical life	hours	100000
-----------------	-------	--------


Mechanical features

Tightening torque for terminals max	Nm	1
Conductor section	AWG/kcmil conductor section	
	max	12
	IEC	
	max	mm ² 1 or 2 / 2.5
Mounting adapter	LPXAU120	
Weight	g	11


Ambient conditions

Temperature	Operating temperature		
	min	°C	-25
	max	°C	+70
	Storage temperature		
	min	°C	-40
	max	°C	+85

Dimensions

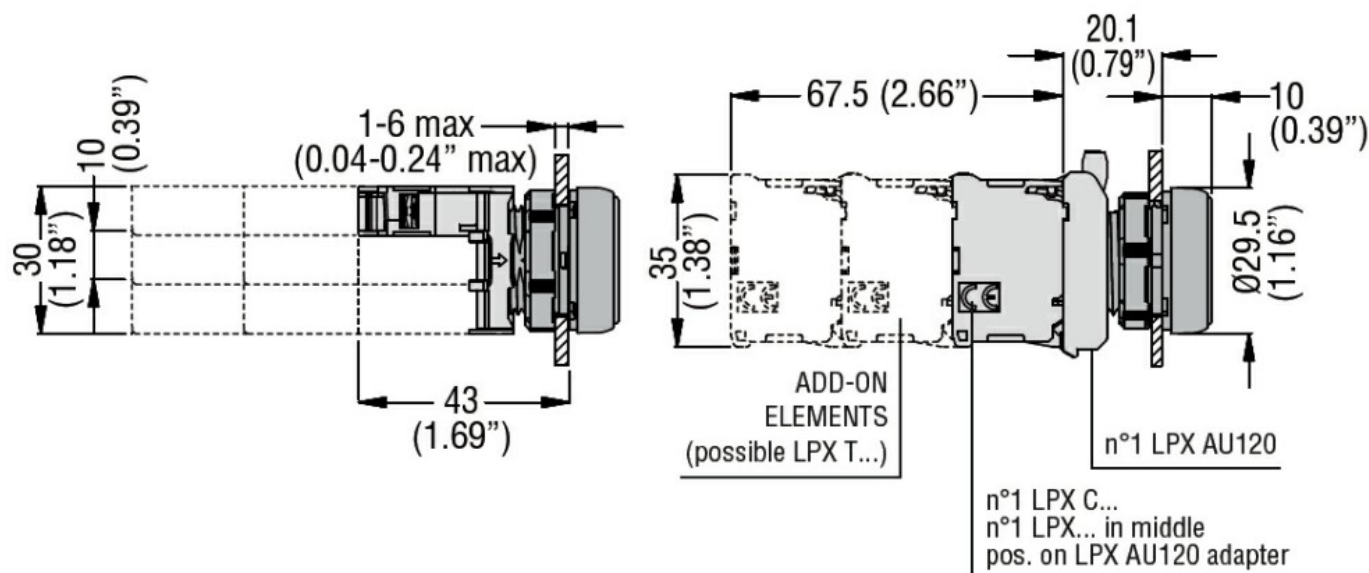

Wiring diagrams

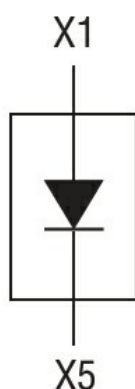

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus

EAC

RINA

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology