



Operations

Electrical life	hours	100000
-----------------	-------	--------


Mechanical features

Tightening torque for terminals max	Nm	1
Conductor section	AWG/kcmil conductor section	
	max	12
	IEC	
	max	mm ² 1 or 2 / 2.5
Mounting adapter	LPXAU120	
Weight	g	11


Ambient conditions

Temperature	Operating temperature		
	min	°C	-25
	max	°C	+70
	Storage temperature		
	min	°C	-40
	max	°C	+85

Dimensions

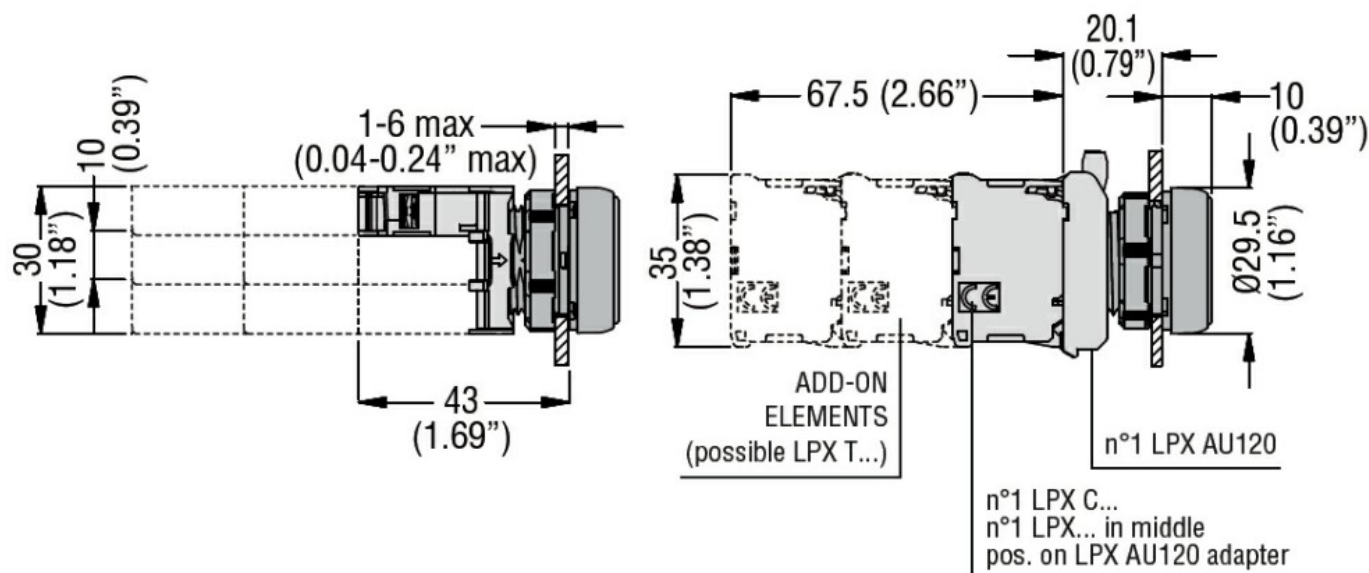

Wiring diagrams

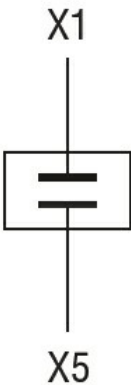

Certifications and compliance

Compliance	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508
Certificates	CCC
	cULus
	EAC
	RINA

ETIM classification

ETIM 8.0	EC002498 - Accessories/spare parts for low-voltage switch technology
----------	--