




#### General characteristics

|                          |                   |
|--------------------------|-------------------|
| Colour                   | Grey              |
| Type of positions        | Flush pushbutton  |
| Material                 | Polycarbonate     |
| IEC degree of protection | IP66, IP67, IP69K |

#### Ambient conditions

|                       |  |     |    |     |
|-----------------------|--|-----|----|-----|
| Temperature           |  |     |    |     |
| Operating temperature |  | min | °C | -25 |
|                       |  | max | °C | +70 |
| Storage temperature   |  | min | °C | -40 |
|                       |  | max | °C | +85 |

#### Dimensions

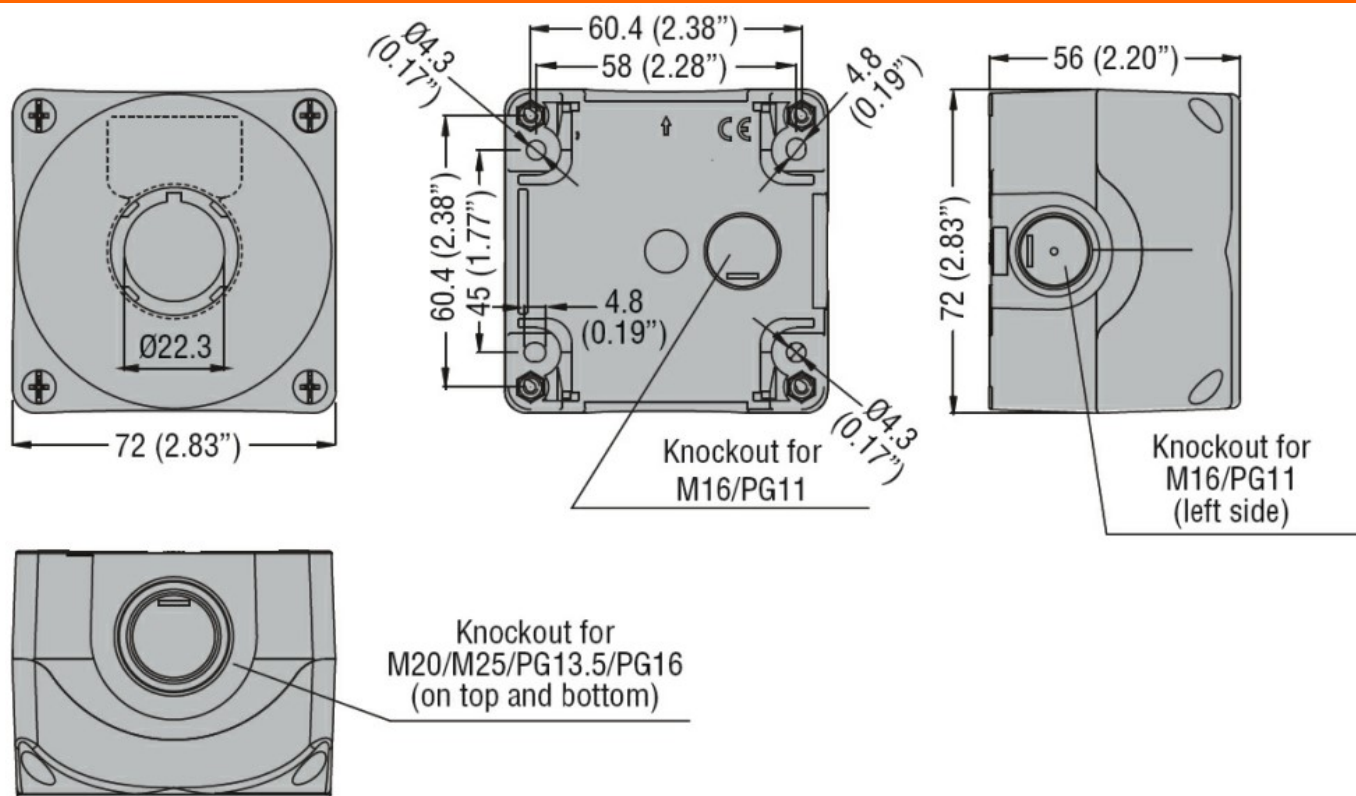

#### Certifications and compliance

|              |       |
|--------------|-------|
| Certificates | cULus |
|--------------|-------|

#### ETIM classification

ETIM 8.0

EC000225 -  
Control circuit  
devices  
combination in  
enclosure