



General characteristics

Diameter	mm - inch	50 / 1.97
Supply voltage (AC)	V	110...230
IEC degree of protection		IP65
Power consumption	VA	1

Mechanical features


Terminals screw	Spring terminals		
Conductor section	AWG/Kcmil	min	16
		max	24
	IEC	min	mm ² 0.25
		max	mm ² 1.5

Weight	g	222
--------	---	-----


Ambient conditions

Temperature	Operating temperature	min	°C	-30
		max	°C	+50

Dimensions

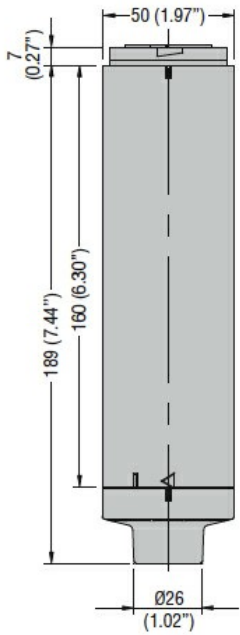

Wiring diagrams

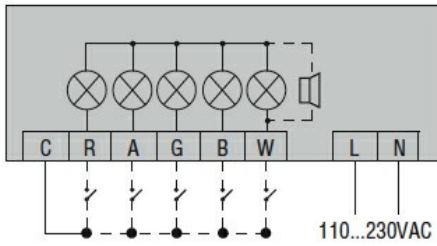

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC001154 -
 Stand for signal
 tower without
 tube