



#### General characteristics

|          |           |           |
|----------|-----------|-----------|
| Diameter | mm - inch | 50 / 1.97 |
| Material |           | Metal     |

#### Mechanical features

|        |   |    |
|--------|---|----|
| Weight | g | 68 |
|--------|---|----|


#### Ambient conditions

Temperature

Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -30 |
| max | °C | +50 |

#### Dimensions

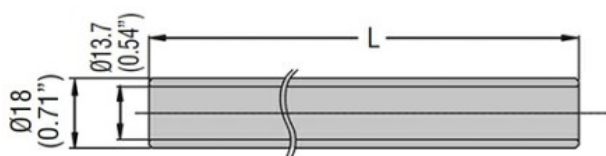

| Type      | L (mm/in)    |
|-----------|--------------|
| LTP50P050 | 50 (1.97")   |
| LTP50P100 | 100 (3.94")  |
| LTP50P250 | 250 (9.84")  |
| LTP50P400 | 400 (15.75") |

#### Certifications and compliance

Compliance

|                     |
|---------------------|
| CSA C22.2 n° 14     |
| IEC/EN/BS 60947-1   |
| IEC/EN/BS 60947-5-1 |
| UL508               |

Certificates

cULus

#### ETIM classification

ETIM 8.0

EC001155 -  
Tube for signal  
tower