



### Counterweights

Counterweight	External, stainless steel AISI 316 (provided with the float switch)
Activation angle	30°

### Relay outputs

Number of relays	Nr.	1
Contact arrangement		1 changeover contact C/O-SPDT
Rated operational voltage AC (IEC)	VAC	250
Contact ratings		AC1 10A 250VAC AC15 8A 250VAC

### Connections

Maximum cable length	m / ft	3
----------------------	--------	---


### Ambient conditions

Temperature	Operating temperature		
	max	°C	+50
	Storage temperature		
	min	°C	-20
	max	°C	+80
Maximum operating pressure	bar	2	
Maximum installation depth	m	20	

### Housing

Cable material	PVC AD8 3G1 for drinking water, heat certified ACS
Float casing material	Polypropylene
IEC degree of protection	IP68
Weight	g 630

### Dimensions

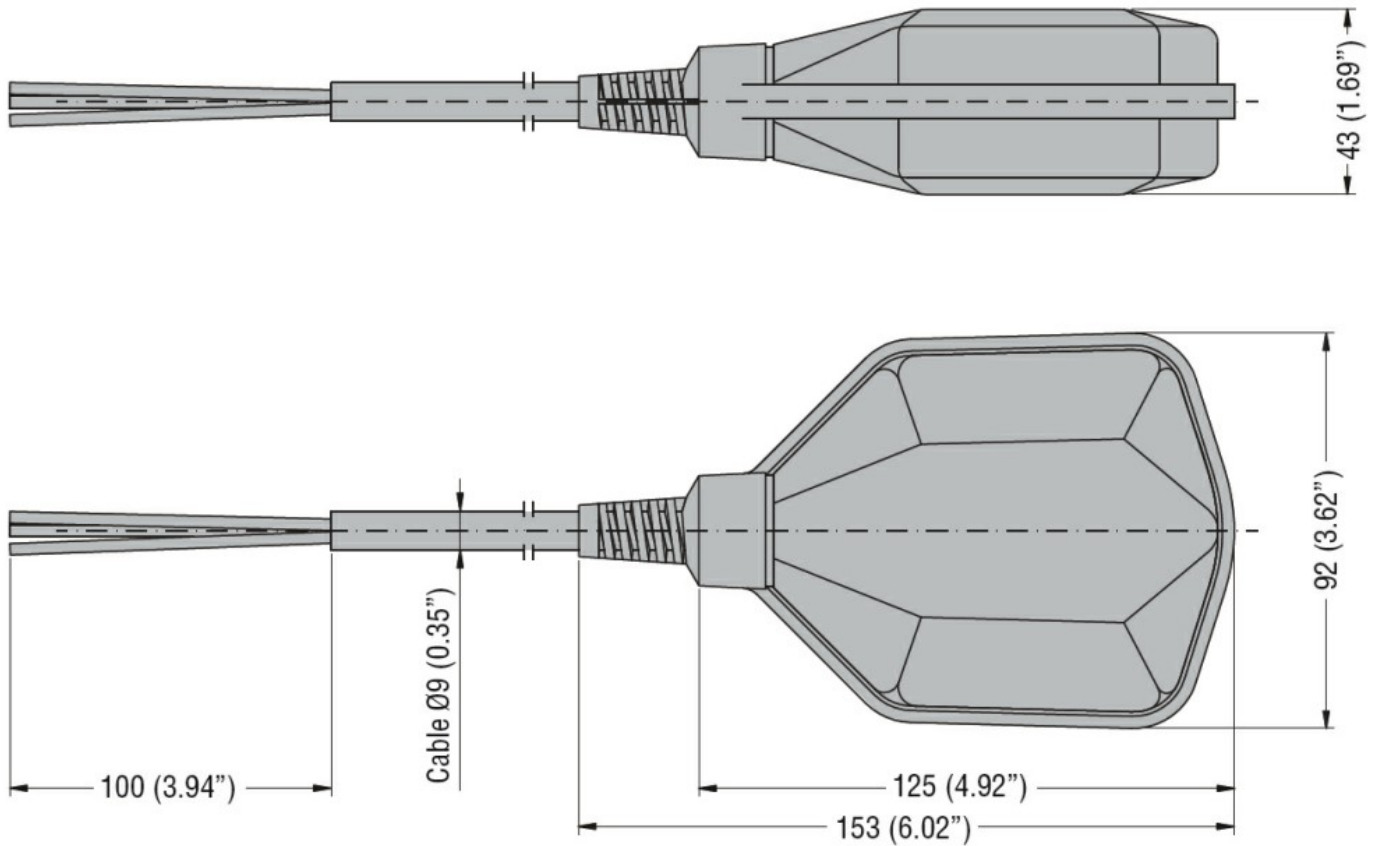

**Certifications and compliance**

Compliance

IEC/EN 60730-1  
IEC/EN 60730-2-15.

Certificates

ACS (Attestation de Conformité Sanitaire)

**ETIM classification**

ETIM 8.0

EC001447 - (Fill)  
level monitoring  
relay