



### Counterweights

Counterweight	External (provided with the float switch)
Activation angle	45°

### Relay outputs

Number of relays	Nr.	1
Contact arrangement		1 changeover contact C/O-SPDT
Rated operational voltage AC (IEC)	VAC	250
Contact ratings		AC1 10A 250VAC AC15 8A 250VAC

### Connections

Maximum cable length	m / ft	5
----------------------	--------	---


### Ambient conditions

Temperature	Operating temperature	max	°C	+50
	Storage temperature	max	°C	+80
Maximum operating pressure		bar		3
Maximum installation depth		m		30

### Housing

Cable material	Neoprene H07 RN-F3X1	
Float casing material	Polypropylene	
IEC degree of protection	IP68	
Weight	g	880

### Dimensions

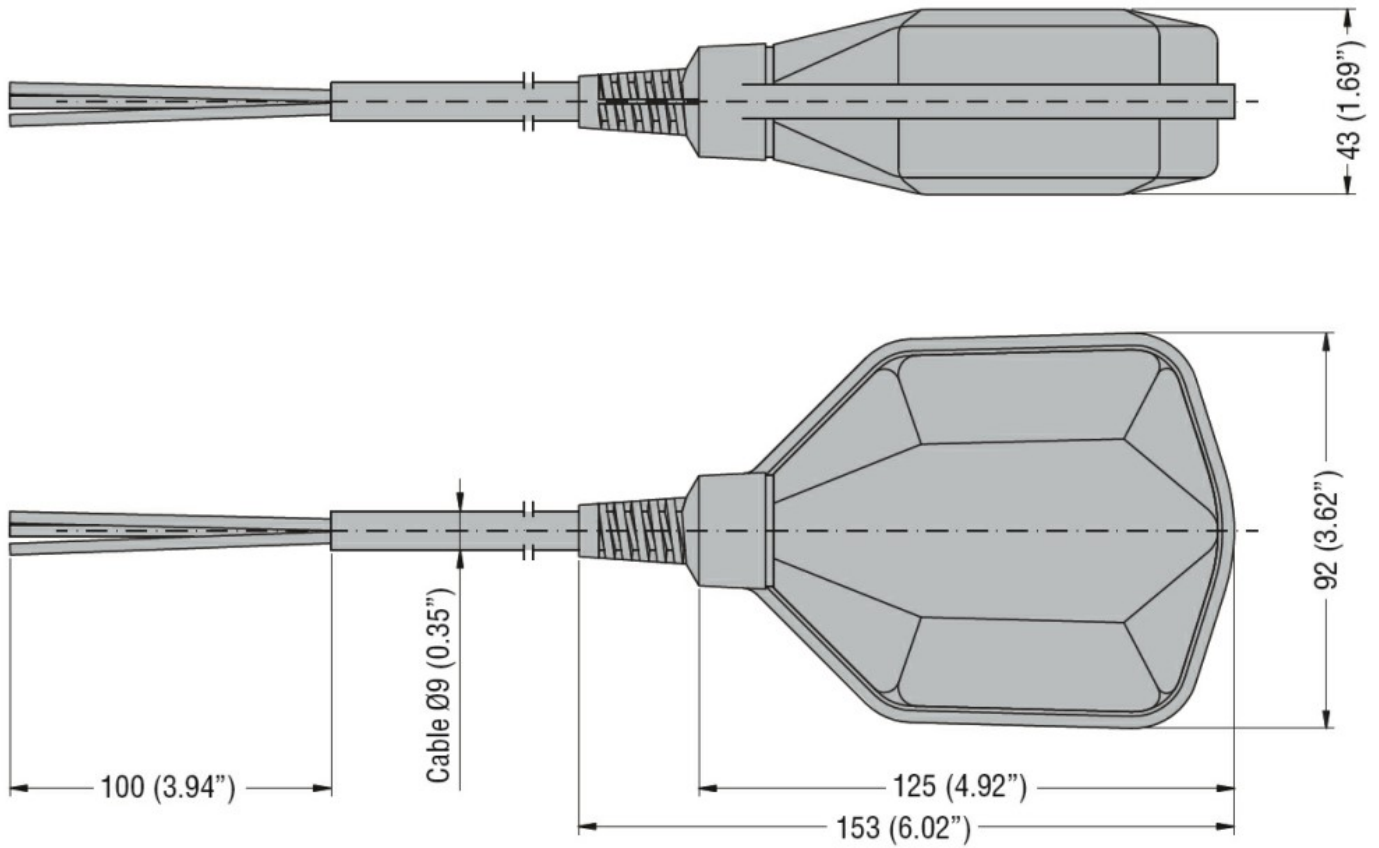

**Certifications and compliance**

Compliance

IEC/EN 60730-1  
 IEC/EN 60730-2-15

Certificates

TÜV-SUD

**ETIM classification**

ETIM 8.0

EC001447 - (Fill)  
 level monitoring  
 relay