



Auxiliary supply

Supply voltage Type		Multi voltage
Rated voltage Us		24/48VDC or 24...240VAC
Operating voltage range		0.85...1.1 Us
Rated frequency	Hz	50/60
Power consumption Max	VA	1.6
Power dissipation Max	W	0.9

Relay outputs

Number of relays	Nr.	2
Relay state		Normally de-energised, energises at tripping
Contact arrangement		2 x 1NO-SPST contact
Rated operational voltage AC (IEC)	VAC	250
IEC Conventional free air thermal current I _{th} ≤ 40°C	A	8
UL/CSA and IEC/EN 60947-5-1 designation		B300
Electrical life (with rated load)	cycles	10 ⁵
Mechanical life	cycles	30x10 ⁶

Indications

Indication		1 green LED for power on 1 red LED for relay state
------------	--	---

Functions

3 detecting electrodes (MIN, MAX and COM)	No
5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM)	No
Sensitivity adjustment 2.5...50k Ω	No
Sensitivity adjustment 2.5...100k Ω	No
Sensitivity adjustment 2.5...200k Ω	No
Adjustable sensitivity full-scale value 25-50-100-200 k Ω	No
Separate sensitivity adjustment for MAX probe (foam detection)	No
Emptying function	No
Filling function	No
Emptying function with MIN and/or MAX alarm	No
Filling function with MIN and/or MAX alarm	No
Emptying function with pump priority change	No
Filling function with pump priority change	No
Tank filling, well drawing and alarm	No
Filling-emptying adjustment selector	No
Programming selector for 5 different	No
Motor start-up priority change	Yes

Connections

Terminals type	Screw
----------------	-------

Tightening torque for terminals

max	Nm	0.8
max	Ibin	7

Conductor cross section

AWG/Kcmil

min	AWG	24
Max	AWG	12

IEC

min	mm ²	0.2
Max	mm ²	4

Insulations

Rated insulation voltage Ui V 250

Rated impulse withstand voltage Uimp kV 4

Operating frequency withstand voltage kV 2

Ambient conditions

Temperature

Operating temperature

min	°C	-20
max	°C	+60


Storage temperature

min	°C	-30
max	°C	+80


Housing

Execution	Modular DIN rail mounting	
N° of modules	1	
Material	Self-extinguishing polyamide	
Mounting	35mm DIN rail (IEC/EN 60715) or by screws using extractable clips	
IEC degree of protection	IP40 on front / IP20 on terminals	
Dimensions (W x H x D)	mm	17.5 x 104.7 x 64.9
Weight	g	90

Dimensions

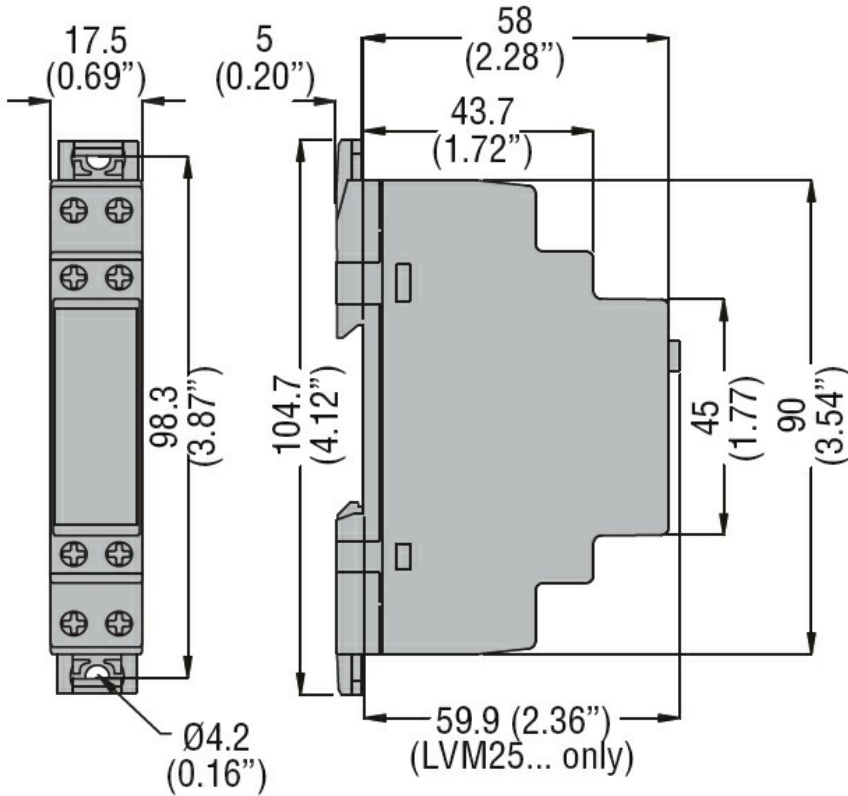

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60255-5

IEC/EN 61000-6-2

IEC/EN 61000-6-3

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001447 - (Fill)
level monitoring
relay