



### Electrical features

Relay adj range	A	1-1.6
IEC technical characteristics ( $\leq 440V$ )	le kW	A kW
		1.6 0.37...0.55

### Components

Starter enclosure standard supplied	M1RA
Contactor standard supplied	BF0910A
Thermal relay standard supplied	RF380160

### UL technical data

UL degree of protection	Type 1, 12K, 4, 4X
-------------------------	--------------------

### Mechanical features

Weight	g	995
--------	---	-----


### Ambient conditions

Operating temperature	min	°C	-25
	max	°C	+60
Storage temperature	min	°C	-40
	max	°C	+70


### Resistance & Protection

IEC degree of protection	IP65
--------------------------	------

### Dimensions

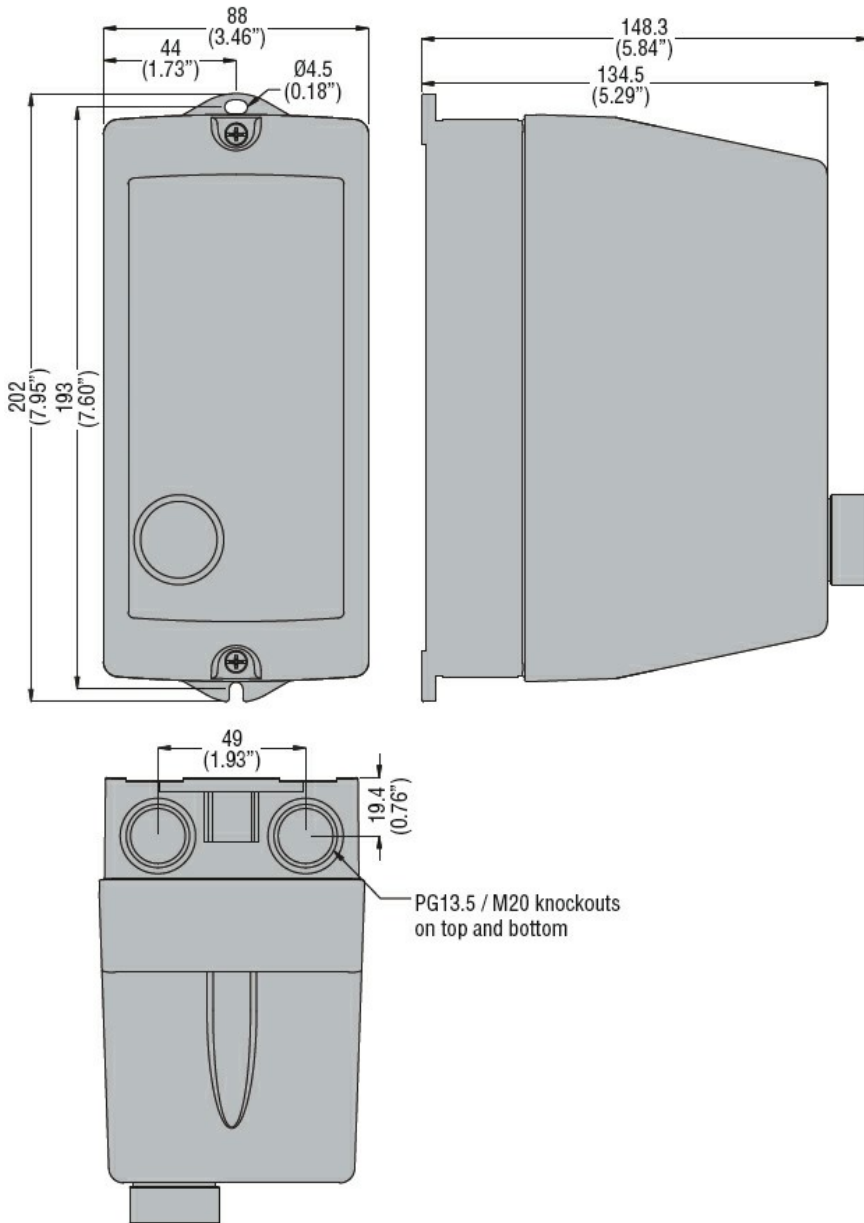

Wiring diagrams

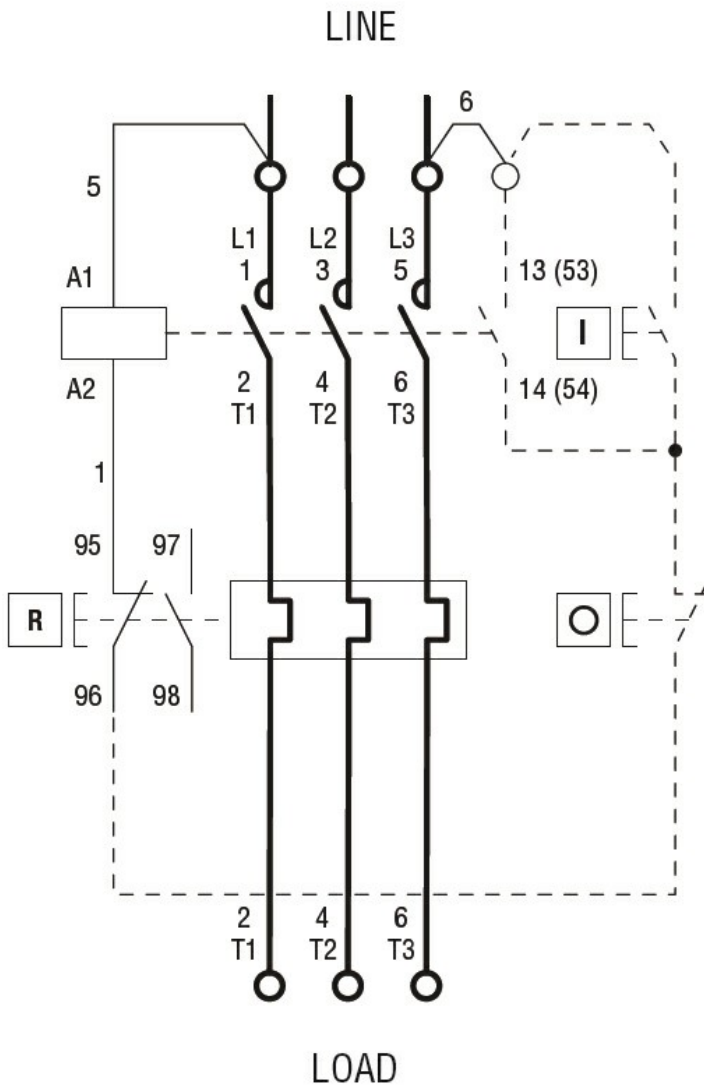

R = Reset; I = Start; O = Stop

### Certifications and compliance

#### Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

#### Certificates

CSAus  
cULus  
EAC

### ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination