





Electrical features			
Maximum operating current ($\leq 440V$)	A		32
Components			
Contactor standard supplied			BF25A, BF26A, BF32A
Thermal relay to purchase separately			RF38
UL technical data			
UL degree of protection			Type 1, 12K, 4, 4X
Mechanical features			
Weight	g		670
Ambient conditions			
Operating temperature	min	°C	-25
	max	°C	+60
Storage temperature	min	°C	-40
	max	°C	+70
Resistance & Protection			
IEC degree of protection			IP65
Dimensions			

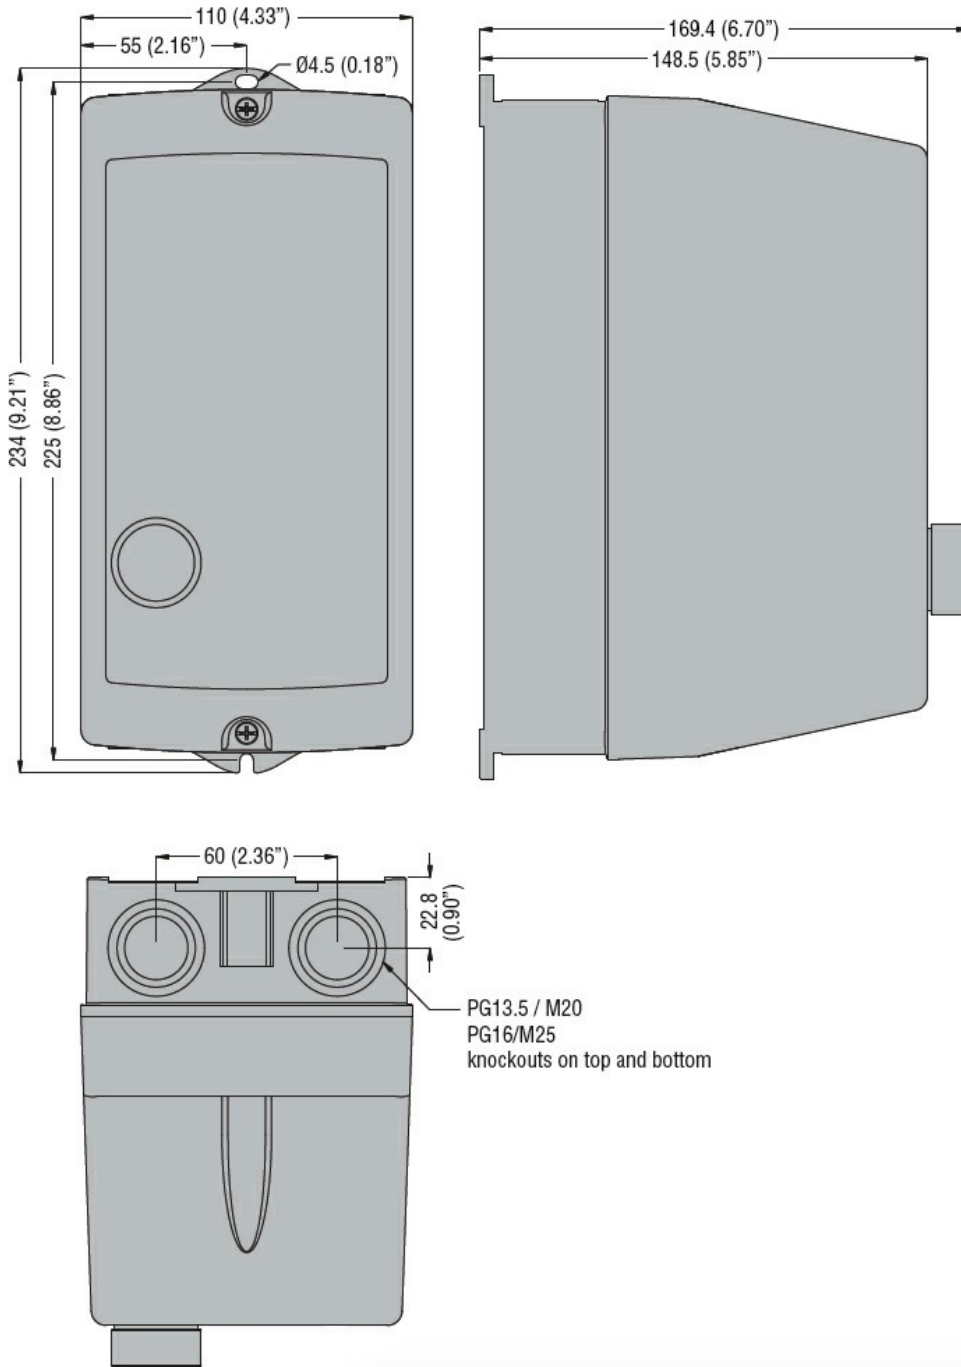

Wiring diagrams

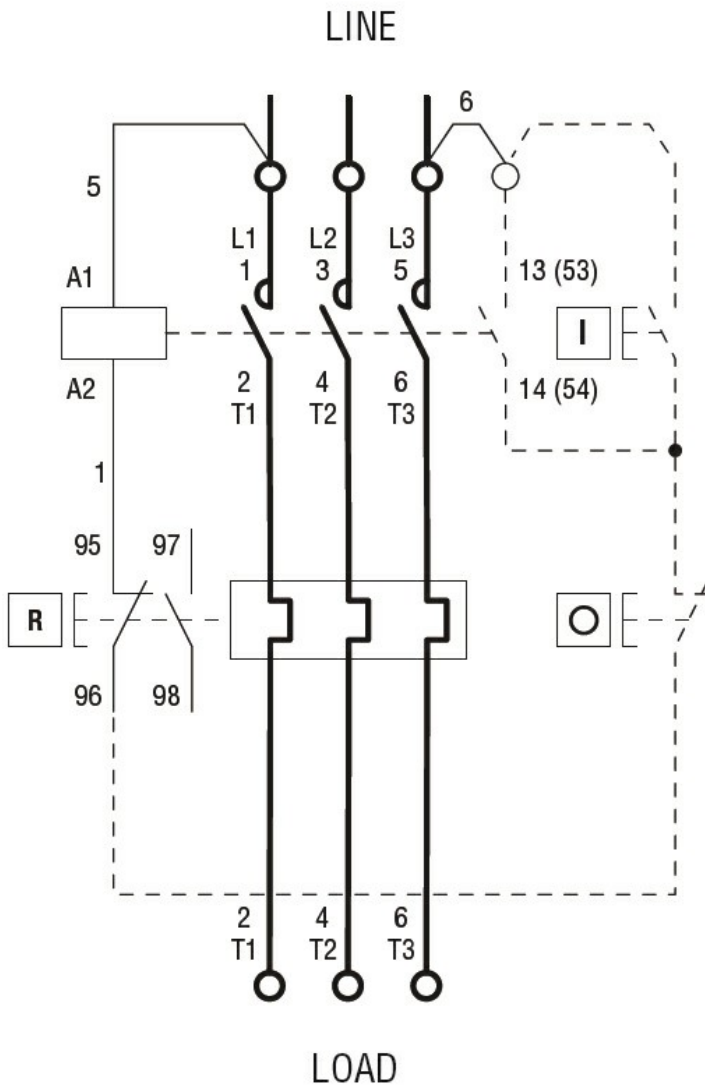

R = Reset; I = Start; O = Stop

Certifications and compliance

Compliance

- CSA C22.2 n° 14
- IEC/EN 60947-1
- IEC/EN 60947-4-1
- UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC000200 -
 Enclosure for
 control circuit
 devices