



### Electrical features

Maximum operating current ( $\leq 440V$ )	A	50
---	---	----

### Components

Starter enclosure standard supplied	M3PA
Contactor standard supplied	BF5000A
Thermal relay to purchase separately	RF82...
Auxiliary contact standard supplied	G41810

### Mechanical features

Weight	g	3110
--------	---	------

### Ambient conditions

Operating temperature	min	°C	-25
	max	°C	+60


### Storage temperature

min	°C	-40
max	°C	+70


### Resistance & Protection

Frontal IP degree	IP65
-------------------	------

### Dimensions

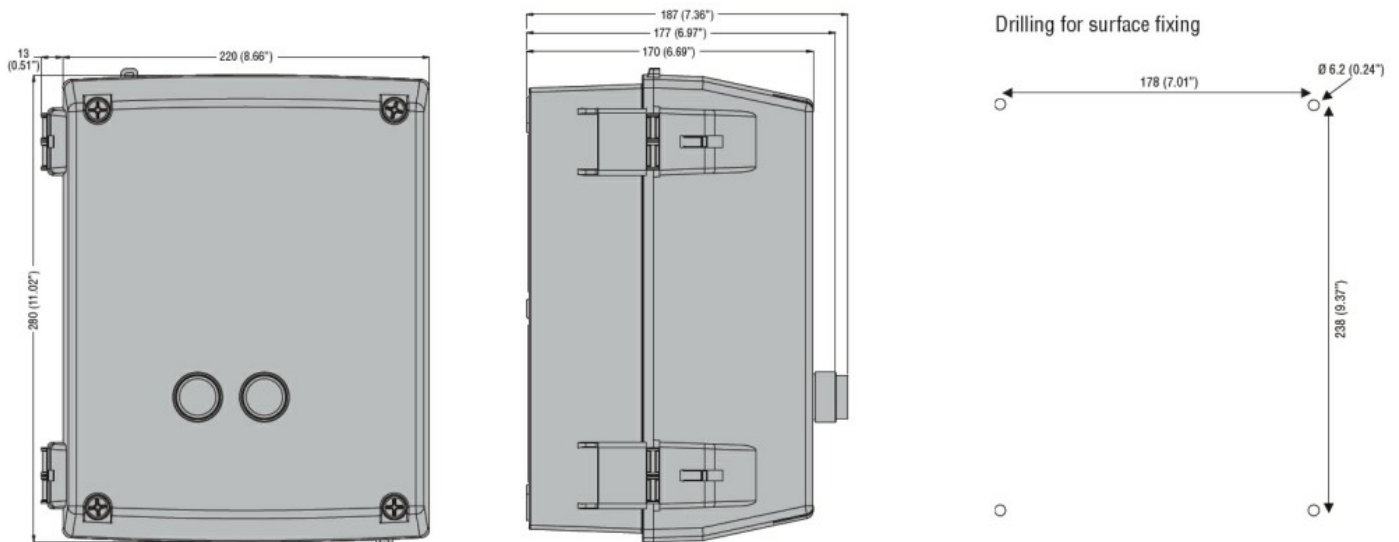

### Wiring diagrams

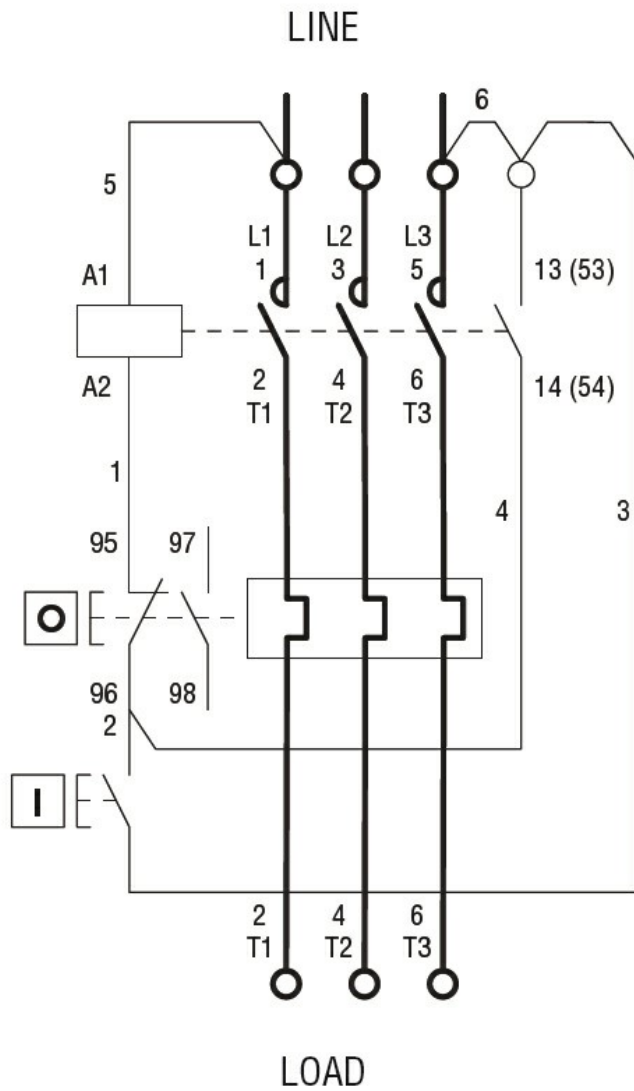

I = Start; O = Stop/Reset

### Certifications and compliance

#### Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

#### Certificates

CSAus  
cULus  
EAC

### ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination